



09/27/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Jun-ichi MATSUDA

Title: DEVICE INFORMATION
ACQUISITION METHOD, DEVICE
CONTROLLER, AND BRIDGE

Appl. No.: Unassigned

Filing Date: September 27, 2000

Examiner: Unassigned

Art Unit: Unassigned



JC531 U.S. PTO

09/27/00

09/27/00

UTILITY PATENT APPLICATION
TRANSMITTAL

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Jun-ichi MATSUDA

Enclosed are:

- [X] Specification, Claim(s), and Abstract (57 pages).
- [X] Formal drawings (17 sheets, Figures 1-20).
- [X] Declaration and Power of Attorney (2 pages).
- [X] Assignment of the invention to NEC CORPORATION.
- [X] Assignment Recordation Cover Sheet.
- [X] Claim for Convention Priority and Priority Document.
- [X] Information Disclosure Statement/PTO-1449/4 References.
- [X] Preliminary Amendment.

The filing fee is calculated below:

	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$690.00	\$690.00
Total Claims:	16	- 20	= 0	x \$18.00	= \$0.00
Independents:	1	- 3	= 0	x \$78.00	= \$0.00
Assignment Recording Fee per property				+ \$40.00	= \$40.00
				SUBTOTAL:	= \$730.00
[] Small Entity Fees Apply (subtract ½ of above):					= \$0.00
				TOTAL FILING FEE:	= \$730.00

- [X] A check in the amount of \$730.00 to cover the filing fee is enclosed.
- [] The required filing fees are not enclosed but will be submitted in response to the Notice to File Missing Parts of Application.
- [X] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 19-0741. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Assistant Commissioner is authorized to charge the unpaid amount to Deposit Account No. 19-0741.


Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date: September 27, 2000

FOLEY & LARDNER
Washington Harbour
3000 K Street, N.W., Suite 500
Washington, D.C. 20007-5109
Telephone: (202) 672-5407
Facsimile: (202) 672-5399

By

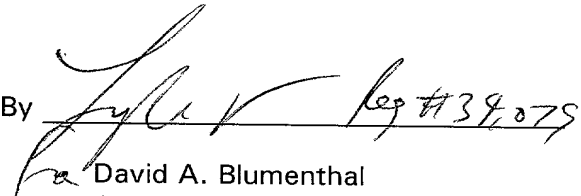
David A. Blumenthal
Attorney for Applicant
Registration No. 26,257

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Jun-ichi MATSUDA
Title: DEVICE INFORMATION
ACQUISITION METHOD,
DEVICE CONTROLLER, AND
BRIDGE
Appl. No.: Unassigned
Filing Date: September 27, 2000
Examiner: Unassigned
Art Unit: Unassigned

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination of the above-identified application, Applicant respectfully requests that the following amendments be entered into the application:

In the Claims:

Please amend the claims as follows:

Claim 15, line 5, delete "any one of claims 1 to 14" and insert --claim 1--.

Claim 16, line 7, delete "any one of claims 1 to 14" and insert --claim 1--.


REMARKS

Applicant respectfully requests that the foregoing amendments to claims 15 and 16 be entered in order to avoid this application incurring a surcharge for the presence of one or more multiple dependent claims.

Respectfully submitted,

Date: September 27, 2000

FOLEY & LARDNER
Washington Harbour
3000 K Street, N.W., Suite 500
Washington, D.C. 20007-5109
Telephone: (202) 672-5407
Facsimile: (202) 672-5399

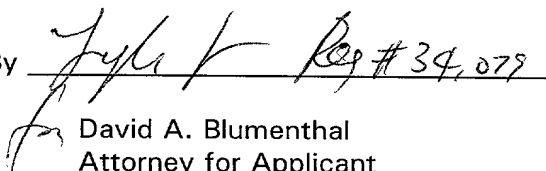By  Reg # 34,079
David A. Blumenthal
Attorney for Applicant
Registration No. 26,257

DEVICE INFORMATION ACQUISITION METHOD,
DEVICE CONTROLLER, AND BRIDGE

BACKGROUND OF THE INVENTION

5 FIELD OF THE INVENTION:

The present invention relates to a device information acquisition method, device controller, and bridge in an IEEE 1394-based communication network.

DESCRIPTION OF THE PRIOR ART:

10 The IEEE 1394 standard is a high-speed serial bus standard, which defines methods for main signal transfer and control signal transfer between personal computers, peripheral devices such as printers, hard disks, and image scanners, video devices such as digital video cameras, and
15 audio devices. A network can be constructed by connecting a plurality of devices incorporating IEEE 1394 bus interfaces (to be referred to as 1394 devices hereinafter).

In a bus based on the IEEE 1394 standard (to be simply referred to as a bus hereinafter), when, for
20 example, a 1394 device is connected/disconnected, bus initialization (to be referred to as bus reset hereinafter) is performed, and an ID number (to be referred to as PHY ID hereinafter) is automatically assigned to the 1394 device. The assigned PHY ID is
25 stored in the CSR space and held by each 1394 device. PHY

002500:0257:0000

ID assignment is performed every time bus reset occurs, and the value assigned to each 1394 device can dynamically change. Communication between 1394 devices is disabled until PHY ID assignment is completed upon occurrence of bus reset. As a method of performing communication between 1394 devices, a method using asynchronous packets is available.

Fig. 1 is a view conceptually showing a specific example of an asynchronous packet. Referring to Fig. 1, a bus ID which is an ID number defined by the IEEE 1394 standard and assigned to the bus to which a destination 1394 device is connected is written in a destination_bus_ID field 54. For communication to be performed within one bus, this bus ID may be written as "3FFh". Note that the last letter "h" indicates that the value is hexadecimal. In a destination_physical_ID field 55, the PHY ID assigned to the source 1394 device is written. In a tcode field 56, the value that represents the type of asynchronous packet and is defined by the IEEE 1394 standard is written. In a source_ID field 57, the bus ID of the bus to which the 1394 device is connected is written in the upper 10 bits, and the PHY ID of the source 1394 device is written in the lower 6 bits. In a data field 58, information to be transmitted is written.

Communications using asynchronous packets are

00220002572550

classified into a read transaction aiming at reading out the contents of the CSR space of the destination 1394 device, a write transaction aiming at a write, and a lock transaction. Asynchronous packets used in a read transaction are called a read request packet and read response packet. Asynchronous packets used in a write transaction are called a write request packet and write response packet. Asynchronous packets used in a lock transaction are called a lock request packet and lock response packet.

In order to control a 1394 device connected to a bus, it is required to acquire device information indicating what performance the 1394 device has and what control is possible. A method of acquiring such device information is conventionally used by a device controller aiming at controlling a 1394 device when the controller acquires the device information of the 1394 device as a control target, as disclosed in, for example, Japanese Unexamined Patent Publication No. 11-205363.

Fig. 2 is a block diagram showing an example of the arrangement of a conventional device controller. Referring to Fig. 2, a device controller 59 is comprised of a device control section 60, device information management table storage section 61, serial bus management 62, 1394 transaction layer 63, 1394 link layer 64, and

1394 physical layer 65. The device controller 59 acquires device information from a 1394 device connected to the bus before device control operation, and stores the acquired information in the device information management table storage section 61 upon linking it with the PHY ID assigned to each 1394 device. An example of the device information which the destination_physical_ID field 55 acquires from the 1394 device is Configuration ROM, which is defined in IEEE 1394 standard, stored at addresses FFFF FFFF F0000 0400h to FFFF FFFF F0000 07FFh in the CSR space and set in each 1394 device. From this information, the device controller 59 can recognize the performance of the 1394 device, to which a given PHY ID is assigned, control which the device can accept, and the like.

Fig. 3 is a flow chart for explaining operation in a conventional device information acquisition method. The device controller 59 specifies a 1394 device from which no device information has been acquired (step Sa1), and transmits a read request packet to the 1394 device (step Sa2). Upon reception of the read request packet (step Sb1), the 1394 device reads out its own Configuration ROM information (step Sb2), and transmits a read response packet containing the readout contents to the device controller 59 (step Sb3). Upon reception of the read response packet (step Sa3), the device controller 59

acquires the device information of the 1394 device from the received read response packet, and stores it in a management table (device information management table storage section 61) (step Sa4). The device controller 59
5 then checks whether device information is acquired from all 1394 devices (step Sa5). If information acquisition is not complete, the flow returns to step Sa1 to repeat the above processing. If acquisition of device information from all the 1394 devices connected to the bus
10 is complete, the processing is terminated.

Fig. 4 is a view conceptually showing a specific example of the format of a management table for managing acquired device information. Referring to Fig. 4, in a PHY ID field 66, the value of the PHY ID assigned to a
15 1394 device is stored. In a device information field 67, the device information acquired from the 1394 device is stored. In controlling the device, the device control section 60 acquires the PHY ID assigned to the 1394 device as a control target from the device information stored in
20 the device information management table storage section 61, and sends out a control signal to the bus through the 1394 transaction layer 63, 1394 link layer 64, and 1394 physical layer 65.

The PHY ID linked to device information may change
25 every time bus reset occurs. Upon detection of bus reset,

002200-02572000

therefore, the device controller 59 re-acquires device information in accordance with the flow chart described above after a PHY ID is assigned to each 1394 device again, and updates the information stored in the management table
5 (device information management table storage section 61).

An IEEE 1394 bridge for connecting a plurality of buses to each other and performing packet forwarding between different buses is under standardization. Using this IEEE 1394 bridge leads to a larger network based on
10 the IEEE 1394 standard and higher efficiency. IEEE 1394 bridges are being standardized by the IEEE P1394.1 working group. An IEEE 1394 bridge has a plurality of portals and an internal switching fabric for exchanging packets between the portals. The respective portals are connected
15 to different buses.

Fig. 5 is a block diagram showing an example of the arrangement of the IEEE 1394 bridge. Referring to Fig. 5, an IEEE 1394 bridge 68 is comprised of portals 69 to 71 and an internal switching fabric 72. The portals 69 to 71
20 are respectively connected to buses 73 to 75. The portals 69 to 71 behave as 1394 devices on the buses. When each portal receives a packet to be sent to another bus, the portal temporarily outputs the received packet to the internal switching fabric 72. The internal switching
25 fabric 72 outputs the packets sent from the portals 69 to

00574570, 005700
002509, 02574560

71 to the corresponding portals 69 to 71. Upon reception of the packets from the internal switching mechanism 72, the portals 69 to 71 send out the packets to the buses to which they are connected.

5 As described above, in a network constituted by different buses connected to each other through an IEEE 1394 bridge, even when bus reset occurs in a given bus, initialization and reassignment of a PHY ID are performed in only the bus in which the bus reset has occurred. For
10 this reason, the remaining buses connected through the IEEE 1394 bridge do not recognize the occurrence of the bus reset. Consequently, communication is not interrupted by bus reset that has occurred in another bus. Consider a general network constituted by a plurality of buses using
15 an IEEE 1394 bridge. The IEEE 1394 bridge has the function of selecting a packet, from the asynchronous packets received by a given portal, which is to be sent to another bus, and transferring the packet. An asynchronous packet forwarding method will be described in detail below
20 with reference to the P1394.1 draft standard issued by the P1394.1 working group.

 The IEEE 1394 bridge extracts a destination_bus_ID field from a received asynchronous packet and determines by referring to prestored forwarding information whether
25 to forward the received packet to an adjacent bus. As the

002200:02972900

storage form of forwarding information, a routing map constituted by 1,023-bit strings as shown in, for example, Fig. 6 is available. When a routing map is to be set such that an asynchronous packet whose destination_bus_ID field has a value "n" is forwarded, the value of the upper (n+1)th bit is set to "1". In the routing map shown in Fig. 6, "1"s are set in the upper 1st, 2nd, and 4th bits.

The conventional device information acquisition method can only acquire the information of a 1394 device connected to the bus to which the self-apparatus is connected and update the acquired device information because no consideration is given to a network constituted by a plurality of buses using an IEEE 1394 bridge. According to the prior art, therefore, in a network constructed by connecting a plurality of buses to each other, the device information of all the connected 1394 devices cannot be entirely acquired. As a consequence, the acquired device information of all the devices cannot be entirely updated in accordance with bus reset and changes in topology.

SUMMARY OF THE INVENTION

The present invention has been made in consideration of the above situation in the prior art, and has as its object to provide a device information acquisition method which can acquire device information of all devices

In order to achieve the above object, according to the first aspect of the present invention, there is provided a device information acquisition method of acquiring device information in which a function of
10 devices are written from the devices connected to a network constituted by a single bus which is a local bus to which the devices are connected or a network formed by connecting, through bridges, a plurality of buses including the local bus and remote buses to which the
15 devices are not connected, comprising the discrimination step of discriminating whether the network is constituted by a plurality of buses or a single bus, the bus ID acquisition step of acquiring a bus ID assigned to each of the remote buses, the information acquisition step of
20 acquiring device information from all devices connected to the network, and the information discarding step of, when at least one of the remote buses is disconnected from the network, discarding device information of devices connected to the disconnected remote bus, wherein if it is
25 discriminated in the discrimination step that the network

is constituted by a single bus, the information acquisition step is executed with respect to all devices connected to the local bus, and if it is discriminated in the discrimination step that the network is constituted by a plurality of buses, the information acquisition step is executed with respect to all devices connected to the buses each having the bus ID acquired in the bus ID acquisition step.

According to the second aspect of the present invention, in the device information acquisition method of the first aspect, the discrimination step comprises checking whether the bridges are connected to the local bus, thereby discriminating whether the network is constituted by a plurality of buses.

According to the third aspect of the present invention, in the device information acquisition method of the first aspect, the discrimination step comprises discriminating, if the value of the bus ID acquired in the bus ID acquisition step is a predetermined value, whether the network is constituted by a single bus, and discriminating, if the value of the bus ID is other than the predetermined value, that the network is constituted by a plurality of buses.

According to the fourth aspect of the present invention, in the device information acquisition method of

the first aspect, each of the bridges receives an asynchronous packet on the local bus and holds forwarding information for determining whether to forward the asynchronous packet to the remote buses, and the bus ID acquisition step comprises acquiring forward information
5 from all bridges connected to the local bus.

According to the fifth aspect of the present invention, in the device information acquisition method of the first aspect, at least one bus ID management node for
10 managing bus ID usage information in which all bus IDs assigned to at least one bus constituting the network is connected to the network, and the bus ID acquisition step comprises acquiring bus IDs assigned to all the buses by acquiring the bus ID usage information from the bus ID
15 management node.

According to the sixth aspect of the present invention, in the device information acquisition method of the first aspect, the information acquisition step comprises the identifier acquisition step of acquiring an
20 identifier assigned to each of the devices connected to the buses of the network, and the individual device information acquisition step of acquiring the device information from each device identified by the identifier acquired in the identifier acquisition step.

25 According to the seventh aspect of the present

initialization notification request step of requesting the node connected to each of the remote buses to notify occurrence of bus initialization in the remote bus, and the information acquisition step is performed again with
5 respect to each of the devices connected to the remote buses upon reception of a notification to the initialization notification request step.

According to the tenth aspect of the present invention, in the device information acquisition method of
10 the first aspect, at least counting node having a counter indicating the number of times of occurrence of bus initialization in the single bus or the plural buses of the network is connected to each bus, the method further comprises the acquisition step of periodically acquiring a
15 value of the counter of the counting node connected to each of the remote buses, and the information acquisition step is performed again with respect to each of the devices connected to the remote bus when a value different from the previously acquired value is acquired in the
20 acquisition step.

According to the eleventh aspect of the present invention, in the device information acquisition method of the fourth aspect, the method further comprises the update notification request step of requesting the bridge
25 connected to the local bus to notify that the forwarding

According to the twelfth aspect of the present invention, in the device information acquisition method of the fourth aspect, the method further comprises the forwarding information acquisition step of periodically acquiring the forwarding information held by the bridge connected to the local bus, and the forwarding information check step of checking whether a bit updated from a first state value to a second state value and a bit updated from the second state value to the first state value exist in the forwarding information acquired in the forwarding

information acquisition step, and when the bit updated
from the first state value to the second state value is
detected in the forwarding information check step, the
information acquisition step is performed with respect to
5 each device connected to a bus having bus ID represented
by the bit, and when the bit updated from the second state
value to the first state value is detected, the
information discarding step is performed with respect to
each device connected to a bus having a bus ID represented
10 by the bit.

According to the thirteenth aspect of the present
invention, in the device information acquisition method of
the fifth aspect, the method further comprises the bus ID
change check step of periodically acquiring the bus ID
15 usage information and checking on the basis of the
acquired bus ID usage information whether a newly used bus
ID or a bus ID that has not been used exists, and when
existence of the newly used bus ID is detected in the bus
ID change check step, the information acquisition step is
20 performed with respect to each device connected to a bus
identified by the bus ID, and when existence of a bus ID
that has not been used is detected, the information
discarding step is performed with respect to each device
connected to a bus identified by the bus ID.

25 According to the fourteenth aspect of the present

invention, in the device information acquisition method of the first aspect, the method further comprises updating the acquired device information by periodically performing the discrimination step, the bus ID acquisition step, and
5 the information acquisition step.

According to the fifteenth aspect of the present invention, there is provided a device controller which is a node connected to a network formed by connecting a plurality of buses to each other through a bridge,
10 comprising acquisition execution means for executing the device information acquisition method defined in any one of the first to 14th aspects.

According to the sixteenth aspect of the present invention, there is provided a bridge for forming a
15 network by connecting a plurality of buses to which devices are connected, comprising transmission means for, upon reception of a read request for information held by the bridge, transmitting the information to a request source in executing the device information acquisition
20 method defined in any one of first to 14th aspects described above.

As is obvious from each aspect described above, according to the present invention, it is discriminated whether a network is constituted by a plurality of buses
25 or a single bus, and device information is acquired from

00674570-000200

all devices connected to the local bus if it is discriminated that the network is constituted by a single bus. If it is determined in the discrimination step that the network is constituted by a plurality of buses, the bus IDs assigned to the respective remote buses are acquired, and device information is acquired from all the devices connected to the respective buses having the bus IDs. In the network formed by connecting a plurality of buses using a bridge, the device information of all the connected devices can be acquired. In addition, at least one remote bus is disconnected from the network, the device information of the devices connected to the disconnected remote bus is discarded. Therefore, the acquired device information can be updated in accordance with bus reset that occurs in a bus connected to the network or a change in topology.

The above and many other objects, features and advantages of the present invention will become manifest to those skilled in the art upon making reference to the following detailed description and accompanying drawings in which preferred embodiments incorporating the principle of the present invention are shown by way of illustrative examples.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a conceptual view showing the format of an

Fig. 12 is a conceptual view showing a request command and response command;

Figs. 13 and 14 are conceptual views showing specific examples of request and response commands, respectively;

5 Fig. 15 is a flow chart showing the details of processing in a state S3;

Fig. 16 is a conceptual view showing a specific example of a management table at the end of acquisition of device information;

10 Fig. 17 is a flow chart showing processing to be performed when bus reset has occurred in a remote bus;

Fig. 18 is a block diagram for explaining operation to be performed when a new bus is added to an existing network;

15 Fig. 19 is a flow chart showing the details of processing in a state S2 in the second embodiment of the present invention; and

Fig. 20 is a flow chart showing the details of processing in a state S3 in the third embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Several preferred embodiments of the present invention will be described below with reference to the accompanying drawings.

25 I. First Embodiment

00260-02912900

5

5

5

10

10

10

15

15

15

20

20

25

(5) State S4 in Which Information of 1394 Device
Connected to Remote Bus Is Being Discarded:

All the information of each 1394 device connected to
a remote bus disconnected from the network is being
5 discarded.

(6) State S5 in Which Information Acquisition for All
1394 Devices Is Completed:

Information acquisition for all the devices connected
to the network is completed.

10 The following are the conditions for state
transitions. Note that ":" represents a state transition.
For example, "S0 : S1" indicates "a transition from the
state S0 to the state S1".

S0 : S1 indicates that device information acquisition
15 starts.

S1 : S2 indicates that information acquisition from
all the 1394 devices connected to the local bus is
completed, and the network is constituted by a plurality
of buses using an IEEE 1394 bridge.

20 S1 : S5 indicates that information acquisition from
all the 1394 devices connected to the local bus is
completed, and the network is constituted by a single bus.

S2 : S3 indicates that the bus IDs assigned to the
buses connected to the network are completely checked.

25 S3 : S3 indicates that the network includes an

unchecked remote bus.

S3 : S5 indicates that the network includes no unchecked remote bus.

S4: S5 indicates that the information of a device
5 connected to a remote bus is completely discarded.

S5 : S1 indicates that bus reset in the local bus is detected.

S5 : S3 indicates that (1) bus reset in a remote bus is detected, or (2) a new bus is connected to the network.

10 S5 : S4 indicates that an existing bus is disconnected from the network.

I-2. Arrangement of Network

Processing in each state in the device information acquisition method according to the first embodiment of
15 the present invention will be described in detail next with reference to the accompanying drawings. Fig. 8 is a block diagram showing an example of the arrangement of the network. Referring to Fig. 8, the network is formed by connecting four buses 0 to 4 to each other through IEEE
20 1394 bridges 10 to 12 each constituted by two portals. Assume that in the first embodiment, each of portals 4 to 9 constituting the IEEE 1394 bridges 10 to 12 has a register (to be referred to as a portal register hereinafter), in the CSR space, which stores information
25 identifying itself as a portal to discriminate the

002200029499

self-device from other 1394 devices. Another 1394 device can recognize the portal by reading out information from the portal register by using a read transaction.

Bus IDs are assigned to the respective buses. In the first embodiment, a portal (to be referred to as an NCM hereinafter) having the function of assigning the bus IDs and managing the usage state of the bus IDs in use assigns bus IDs to the respective buses. Only one NCM exists in the overall network. In the first embodiment, the portal 4 is the NCM. Note that the bus ID assigned to a given bus does not change as long as the bus is connected to the network in which the NCM exists. If the NCM is disconnected from the network, since the portal for assigning and managing bus IDs stops existing on the network, the bus IDs assigned to all the buses are discarded. Subsequently, communication cannot be performed between different buses until a new NCM is defined and new bus IDs are assigned. As the storage form of the usage information of the bus IDs used in the network, which is stored in the NCM, a bus ID bitmap constituted by 1,023-bit strings is used. In the bus ID bitmap, if, for example, a bus ID "n" is used, the upper (n+1)th bit in the bitmap is set to "1".

In the first embodiment, the bus ID assigned to each bus must be notified to the portal of each bus, but is not

notified to 1394 devices other than the portals. If the 1394 devices other than the portals are not notified of the above information, the upper 10 bits of a source_ID field 57 of an asynchronous packet transmitted from each 1394 device is set to "3FFh" because the 1394 device does not recognize the bus ID of the bus to which it is connected. Upon reception of an asynchronous packet to be forwarded to another bus, a portal extracts the upper 10 bits of the source_ID field 57. If the extracted value is "3FFh", the portal rewrites it into the bus ID of the bus to which it is connected.

According to the first embodiment, in communication using asynchronous packets between different buses, a virtual ID number (to be referred to as a virtual ID hereinafter) that does not change in response to bus reset is used. The virtual ID will be described below.

The virtual ID has a length of 6 bits and is set in a destination_physical_ID field 55 in place of the PHY ID assigned to a destination node when an asynchronous packet is to be transmitted to the destination node connected to another bus. The virtual ID is assigned to each 1394 device by one portal (to be referred to as an alpha portal hereinafter) selected from the portals connected to the bus. In the case shown in Fig. 8, the alpha portal of the bus 0 is the portal 4; the alpha portal of the bus 1, the

portal 5; the alpha portal of the bus 2, the portal 8; and the alpha portal of the bus 3, the portal 9.

The virtual ID assigned to each node is managed by only a corresponding portal and is not notified to other
5 nodes. When, therefore, communication is to be performed with a 1394 device connected to another bus by using a virtual ID, the portal that is connected to the same bus as that of the transmission node for a packet and forwards the packet to another bus converts the PHY ID of the
10 source 1394 device which is written in the lower 6 bits of the source_ID field into a virtual ID, and then outputs the packet to an internal switching fabric 72. When the asynchronous packet sent from the internal switching fabric 72 is to be sent out to the bus to which the source
15 node is connected, the packet is sent out after the destination_physical_ID field 55 is converted into the PHY ID actually assigned to the destination 1394 device.

In order to perform the above processing, each portal has a virtual ID-PHY ID conversion table for the 1394
20 devices connected to the bus to which the portal itself is connected. A case wherein a 1394 device 13 connected to the bus 1 is to acquire device information will be described below. The 1394 device 13 is identical to the conventional device controller in Fig. 2 and serves as a
25 node designed to acquire the device information of each

002200 02574560

device connected to the network and control the 1394 devices by referring to the acquired device information. From the viewpoint of the 1394 device 13, the network is constituted by the bus 1 as a local bus and the buses 0, 2, and 3 as remote buses.

I-3. Operation of First Embodiment

(1) Acquisition of Device Information in Local Bus:

Fig. 9 is a flow chart for explaining acquisition processing for the device information of each 1394 device connected to the bus 1 in the state S1 shown in Fig. 7. The 1394 device 13 acquires the device information of 1394 devices 21 and 22 connected to the bus 1 and the portals 5 to 7 by using a read transaction, and stores the acquired device information upon linking it to each PHY ID (step SA1). Thereafter, the 1394 device 13 acquires the information of the portal registers by performing a read transaction with respect to all the 1394 devices connected to the bus 1 (step SA2). The 1394 device 13 checks whether the read transaction has succeeded (step SA3). If the transaction has succeeded, the 1394 device 13 recognizes the 1394 devices as portals (step SA4). In the above read transaction, since success can be attained for only the 1394 devices incorporating portal registers (portal registers 5 to 7), the 1394 device 13 recognizes the 1394 devices for which the read transaction with

respect to the portal registers has succeeded as portals,
and stores their information upon linking it to each PHY
ID. The 1394 device 13 then checks whether acquisition of
information from all the 1394 devices (local bus) is
5 completed (step SA5), and repeatedly executes the above
processing until the acquisition is completed. If the
acquisition is completed, the 1394 device 13 stores its
own device information upon linking it to the PHY ID
assigned to the device itself (step SA6).

10 Fig. 10 is a view conceptually showing an example of
the management table of the device information acquired in
the local bus. Referring to Fig. 10, a bus ID field 25
has a 10-bit field and indicates the bus ID of the bus to
which each 1394 device is connected. In the current stage,
15 since the 1394 device 13 does not recognize the bus ID of
the bus 1, the initial value "3FFh" is written. A PHY ID
field 26 has a 6-bit field, in which the PHY ID assigned
to each 1394 device is written. In a device information
field 27, acquired device information is stored. In a
20 PORTAL field 28, "1" is written if the 1394 device is a
portal; "0" is written otherwise.

When the device information of all the 1394 devices
connected to the bus 1 and the information in the portal
registers are completely read out, the 1394 device 13
25 selectively performs subsequent processing depending on

whether any portal is connected to the bus 1. More specifically, after the acquisition of the device information of all the 1394 devices connected to the bus 1, the 1394 device 13 looks up the management table for the stored device information to check whether there is any 1394 device in which "1" is written in the PORTAL field 28 (step SA7). If there is a 1394 device in which "1" is written in the PORTAL field 28, the 1394 device 13 makes a transition to the state S2 to acquire the device information of each 1394 device connected to a remote bus. If there is no 1394 device in which "1" is written in the PORTAL field 28, the 1394 device 13 terminates the device information acquisition and makes a transition to the state S5.

(2) Method of Checking Bus Ids:

Upon recognizing that the network is constituted by a plurality of buses, the 1394 device 13 makes a transition to the state S2 to check the bus IDs used in the network. Fig. 11 is a flow chart for explaining the processing of acquiring all the bus IDs used in the network in the state S2. The 1394 device 13 looks up the PORTAL field 28 in the management table for the device information acquired in the state S1 to specify the PHY IDs of the portals connected to the local bus (step SB1). The 1394 device 13 performs a read transaction with respect to the portal

(portal 6) having the smallest PHY ID among the specified portals to acquire the value of the bus ID ("1" in this case) assigned to the bus 1 (step SB2). Thereafter, the 1394 device 13 updates the bus ID field 25 in the management table to the acquired value on the basis of the acquired value of the bus ID (step SB3). The 1394 device 13 looks up the PORTAL field 28 in the management table to read out routing maps from the portals 5 to 7, and stores the readout values (steps SB4 and SB5). Commands are used to read out the above routing maps. The commands will be described below.

Commands that are used to make requests to portals are called request commands, whereas commands that are used to reply to received request commands are called response commands. Request and response commands are transmitted by performing write transactions with respect to areas (to be referred to as command areas hereinafter) ensured in CSR spaces in advance. In order to cope with request and response commands, therefore, command areas need to be implemented in advance. A given 1394 device which has received request and response commands acquires the required contents and returned information by reading out the contents written in the command area.

Fig. 12 is a conceptual illustration showing an example of the format of a command. Referring to Fig. 12,

a value indicating a write request is written in a tcode field 29. In a destination_offset field 30, the start address of the command area ensured in the CSR space is written. Only 1394 devices that have implemented command areas can use commands. A command type field 31 is a field indicating the type of command. For example, "1h" is written for a request command, and "0h" is written for a response command. A command label field 32 is a label for identifying a command. The value of the command label field of a given request command must coincide with that of a corresponding response command. An opcode field 33 is a field indicating the operation to be performed by the 1394 device that has received the request command or the information of the state which is to be returned. An operand field 34 is a field for storing information required to execute the operation designated by the opcode field 33 or information contained in the returned information. The value of this field varies depending on the command.

Fig. 13 is a conceptual illustration showing a specific example of the request command which the 1394 device 13 transmits to the portal 5 in step SB4 described above. Referring to Fig. 13, "3FFh" indicating communication to be performed in the local bus is set in a destination_bus_ID field 35. In a destination_physical_ID

field 36, the PHY ID of the portal 5 is set. In a tcode field 37, "0h" indicating that the command is the write request for data quadlet defined by the IEEE 1394 standard is written. In a source_ID field 38, "3FFh" is written in the upper 10 bits, and the PHY ID of the 1394 device 13 is written in the lower 6 bits. In a command type field 39, a value "1h" indicating that the command is a request command is set. In a command label field 40, "1h" is set as a specific example. In an opcode field 41, a value indicating that the request command requests the return of a routing map is set. In this case, "00h" is written as a specific example. In an operand field 42, "00h" is set because it is not used by this request command.

Referring back to Fig. 11, the portal reads out the contents written in the command area and recognizes the contents requested by the request command from the opcode field of the received request command (step SC1). In this case, the portal 5 recognizes that the return of the stored routing map is requested. The portal 5 reads out the routing map stored in the portal itself (step SC2), and transmits a response command in which the routing map stored in the portal itself is written in the operand field (step SC3).

Fig. 14 is a conceptual illustration showing a specific example of the response command to be returned.

Referring to Fig. 14, "3FFh" is set in a destination_bus_ID field 43, and the PHY ID of the 1394 device 13 is set in a destination_physical_ID field 44. These values can be acquired from the source_ID field 38 of the received request command. In a command type field 45, "0h" indicating that the command is a response command is set. In a command label field 46, "1h" which is the same value set in the received request command is set. In an operand field 47, the value of the routing map stored in the portal is stored.

Referring back to Fig. 11, the 1394 device 13, which has received the above response command, can read out data from the command area and acquire the routing map of the portal 5 which is written in the operand field (step SB5). The 1394 device 13 then checks whether data are completely read out from all the portals (step SB6). If this operation is not completed, the 1394 device 13 performs steps SB4 and SB5 described above for all the portals connected to the local bus. If response commands are received from all the portals and routing maps are completely acquired, the 1394 device 13 carries out the bit OR (logical OR) between the acquired routing maps, thereby acquiring all bus IDs assigned to remote buses of the bus IDs used in the network (step SB7).

When the above processing is completed, the 1394

device 13 makes a transition to the state S3.

(3) Information Acquisition in Remote Buses:

The 1394 device 13 which has made a transition to the state S3 acquires the device information of each 1394 device connected to a remote bus. The details of this processing will be described below with reference to the accompanying drawings. Fig. 15 is a flow chart for explaining the processing of acquiring the information of each 1394 device connected to an unchecked remote bus.

10 The 1394 device 13 checks whether any remote bus, of the remote buses having the bus IDs acquired in the state S2, which has not undergone a check. If there are unchecked remote buses, the 1394 device 13 selects one of them (step SD1). Assume that the bus 0 is selected as an unchecked

15 remote bus. In this case, the 1394 device 13 transmits a request command to the portal 4 to request all the virtual IDs assigned to the 1394 devices connected to the bus 0 (step SD2).

The alpha portal 4 reads out the contents of the received request command from the command area and recognizes from the opcode field that the portal itself is requested by the 1394 device 13 to notify all the virtual IDs assigned to the 1394 devices connected to the bus 0 (step SE1). Upon recognizing the request, the alpha

25 portal 4 refers to the virtual ID/PHY ID table stored in

the portal itself (step SE2), and transmits a response command in which all the virtual IDs used are written in the operand fields (step SE3).

Upon reception of the response command, the 1394
5 device 13 reads out the contents written in the command
area and acquires all the virtual IDs which are assigned
to the 1394 devices connected to the bus 0 and written in
the operand fields (step SD3). The 1394 device 13
performs a read transaction for a device connected to the
10 bus 0 on the basis of this information (virtual IDs) to
read out device information (step SD4). The 1394 device
13 then stores the acquired information upon linking it to
the bus ID and virtual ID of the remote bus that has been
checked (step SD5). The 1394 device 13 checks whether the
15 device information of all the devices connected to the bus
0 is completely acquired and stored (step SD6). The 1394
device 13 executes steps SD4 and SD5 until the above
acquisition is completed. If the acquisition of device
information is completed, the 1394 device 13 transmits a
20 request command to the alpha portal 4 to request it to
notify bus reset if it is detected in the bus 0 (step SD7).
Thereafter, the flow returns to step SD1. The operation
using the above request command will be described in
detail later.

25 The above processing is repeated until no unchecked

remote bus exists in the network. If no unchecked remote bus exists, the 1394 device 13 transmits a request command to each of the portals (portals 5 to 7) connected to the bus 1 to request each portal to notify, when the routing map is updated, whether a new bus is added or an existing bus is disconnected from the network, and makes a transition to the state S5 in Fig. 7 (step SD8). The operation using the above request command will be described in detail below.

10 (4) Management of Acquired Information:

The device information acquired by the above device information acquisition method is stored in the management table held in the 1394 device 13. Fig. 16 is a conceptual illustration showing an example of the management table stored in the 1394 device 13 when the acquisition of the device information of each 1394 device connected to the network is completed. Referring to Fig. 16, the acquired device information of each 1394 device is stored in correspondence with a combination of a bus ID and a PHY ID.

20 Note that the pieces of information of the devices connected to the remote buses (buses 0, 2, and 3), which are acquired in the state S3, are stored in correspondence with combinations of bus IDs and virtual IDs.

(5) Updating of Device Information upon Bus Reset in
25 Local Bus:

00671679-092700
002200-02572500

When bus reset occurs in the bus 1, the 1394 device 13 discards all the information corresponding to each bus ID field 25 in which "001h" is set in the stored management table upon detection of the occurrence of the bus reset. Thereafter, the 1394 device 13 makes a transition to the state S1 shown in Fig. 7, and performs the processing shown in Fig. 9 to acquire the device information of each node connected to the bus 1. After the acquisition of the device information, the 1394 device 13 makes a transition to the state S2 and performs the processing shown in Fig. 11. The 1394 device 13 then makes a transition to the state S3. In the state S3, the 1394 device 13 performs the processing shown in Fig. 15 and makes a transition to the state S5.

(6) Detection of Bus Rest in Remote Bus and Updating of Device Information:

A method of updating device information upon occurrence of bus reset in a remote bus will be described next. Assume that the device information of each 1394 device connected to a given remote bus is completely acquired. In this case, as described above, upon detecting bus reset in the remote bus, the 1394 device 13 transmits a request command to the corresponding alpha portal to notify it (step SD7 in Fig. 15). The alpha portal reads out the contents of the received request

command from the command area, and recognizes from the opcode field that the received command is a request command to request notification of the occurrence of the bus reset. The alpha portal then stores the value of the source_ID field of the received asynchronous packet and the values of the command type field, command label field, and opcode field contained in the request command. Every alpha portal in the network refers to the information of the request command transmitted from the 1394 device 13 in step SD7 in Fig. 15 and stored in the portal itself upon detecting bus reset in the bus to which the portal itself is connected, and notifies the 1394 device 13 of the detection of the bus reset in the form of a response command. Processing to be performed when bus reset occurs in the bus 2 will be described below as a specific example.

Fig. 17 is a flow chart for explaining the processing performed by the alpha portal and 1394 device 13 when bus reset occurs in the bus 2. Upon detecting the reset, the alpha portal 8 refers to the information of the previously received request command (step SG1) and notifies the 1394 device 13 of the occurrence of the bus reset by using a response command (step SG2).

Upon receiving the response command (step SH1), the 1394 device 13 specifies the bus ID of the bus in which the bus reset has occurred from the received response

command (step SH2). In this case, the bus ID is "2". Upon specifying the bus ID, the 1394 device 13 looks up the stored management table and discards the device information corresponding to each bus ID field 25 in which

5 "002h" is set (step SH3). The 1394 device 13 then sets the bus 2 as an unchecked remote bus and makes a transition to the state S3 (step SH4). In the state S3, since the bus is set as an unchecked remote bus, the 1394 device 13 acquires the device information of each 1394

10 device connected to the bus 2 again, and stores the acquired information in the management table.

With the above processing, even if bus reset occurs in a remote bus, the occurrence of the bus reset can be detected, the corresponding device information can be

15 updated.

(7) Detection of Change in Topology in Network and Updating of Device Information:

When the pieces of device information of all the 1394 devices connected to the network are completely acquired,

20 the 1394 device 13 transmits request commands to all the portals (portals 5 to 7) connected to the bus 1 to request them to notify updating of the routing maps when they are updated (step SD8 in Fig. 15). Upon receiving the request command, each portal recognizes that it is requested to

25 notify the 1394 device 13 of updating of the routing map

when it is updated, and stores the value of the source_ID field of the received asynchronous packet and the values of the command type field, command label field, and opcode field contained in the request command. When the routing map is updated, the corresponding portal notifies the 1394 device 13 of the updating operation in the form of a response command to the received request command.

Fig. 18 is a block diagram for explaining processing to be performed when a new bus is added to an existing network. A case wherein a new bus 53 (bus ID = 4) is connected to the bus 3 will be described below as a specific example. When the bus 53 is newly connected, the routing maps in the portals 4, 8, and 7 are updated. More specifically, "4" is newly set in the routing map stored in each portal.

Upon detecting that the routing map is updated, the portal 7 detects the addition of the new value "4" by comparing the routing map before updating with the routing map after updating. The portal 7 then refers to the information of the stored request command and transmits, to the 1394 device 13, a response command in which information indicating that the bus ID is "4" is written in the operand field. Upon receiving the response command from the portal 7, the 1394 device 13 refers to the information contained in the operand field of the response

command and recognizes that a new bus is connected to the network and it is bus ID is "4". Thereafter, the 1394 device 13 sets the remote bus (bus 53) whose bus ID is "4" as an unchecked remote bus, and makes a transition to the state S3 in Fig. 7. In the state S3, the processing shown in Fig. 15 is performed.

A case wherein the bus 53 in Fig. 18 is disconnected from the network will be described next as a specific example. When the bus 53 is disconnected from the network, the routing maps of the portals 4, 8, and 7 are updated. More specifically, "4" set in each routing map is deleted. Upon detecting that the routing map is updated, the user interface section 7 detects the deletion of "4" by comparing the routing map before updating with the routing map after updating. The portal 7 then refers to the request command stored in correspondence with the 1394 device 13 and transmits, to the 1394 device 13, a response command in which information indicating that "the existing bus is disconnected from the network and the bus ID of this bus is "4"" is written in the operand field. Upon receiving the response command from the portal 7, the 1394 device 13 refers to the contents contained in the response command and recognizes that the bus with the bus ID "4" is disconnected from the network. The 1394 device 13 then makes a transition to the state S4 in Fig. 7. In the

5 information are completely discarded, the state S5 is
restored.

I-4. First Modification

the remote bus about the number of times bus reset has occurred may be used. A specific example of this method will be described below. The alpha portal has a counter whose count value increments when bus reset is detected in the bus to which the portal itself is connected. The 1394 device 13 periodically transmits a request command to the alpha portal of each remote bus to request it to notify the count value. Upon receiving the request to notify the count value, the alpha portal of each remote bus transmits a response command in which the count value is written in the operand field to the 1394 device 13. The 1394 device 13 acquires the count value at the time of the inquiry by reading out the operand field of the received response command from the command area, and compares the count value with the previously acquired count value. If the acquisition count value differs from the previously

5

I-5. Second Modification

10

20

25

change in the topology of the network, even when a 1394 device or bus is connected/disconnected to/from the network, such an event can be reflected in processing such as control operation using device information regardless
5 of where it occurs.

II. Second Embodiment

(1) Method of Checking Bus IDs:

In the second embodiment of the present invention, all bus IDs used in an overall network are acquired by
10 making an inquiry to the NCM. More specifically, all the bus IDs used in the network can be known by reading out the bus ID bitmap stored in the NCM.

Fig. 19 is a flow chart for explaining processing in a state S2 in the second embodiment. When processing in a state S1 is completed, a 1394 device 13 makes a transition
15 to the state S2. In the state S2, upon performing the processing in steps SB1 to SB3 shown in Fig. 11 (step SI1), the 1394 device 13 transmits a request command to an NCM 4 to request it to return a bus ID bitmap (step SI2). The
20 NCM 4 reads out the received request command from the command area and recognizes from the opcode field that it is requested to return the bus ID bitmap (step SJ1). Thereafter, the NCM 4 refers to the stored bus ID bitmap (step SJ2) and transmits, to the 1394 device 13, a
25 response command in which the bus ID bitmap is written in

002200:002200

5

10

III. Third Embodiment

15

20

25

specific example of this processing will be described below.

Fig. 20 is a flow chart for explaining the details of the processing performed by a 1394 device 13 in the state S3 and the operation of the alpha portal upon reception of a request command. First of all, the 1394 device 13 checks whether there is any unchecked remote bus (step SK1). If it is determined that a bus 0 is to be checked, the 1394 device 13 transmits a request command to an alpha portal 4 to request it to acquire the device information of each node connected to the bus 0 and return the acquired information (step SK2).

Upon receiving the request command, the alpha portal 4 reads out data from the command area and recognizes from the opcode field that it is requested to notify the device information of each 1394 device connected to the bus 0 (step SL1). The alpha portal 4 acquires device information by performing read transactions with respect to all the 1394 devices connected to the bus 0 in place of the 1394 device 13 (step SL2). After the acquisition of device information, the alpha portal 4 returns a response command in which the acquired information is written in the operand field to the 1394 device 13 (step SL3).

Upon receiving the response command, the 1394 device 13 reads out the received contents from the command area

and acquires the device information of each 1394 device connected to the bus 0, which is written in the operand field (step SK3). The acquired information is stored in the management table (step SK4). Note that step SK5 is
5 the same as step SD7 in Fig. 15 described above, and step SK6 is the same as step SD8 in Fig. 15.

In addition to the effects of the first embodiment of the present invention, the third embodiment can simplify the processing performed by the node which acquires
10 information during device information acquisition processing, and hence can reduce the communication traffic between buses in acquisition of device information.

IV. Fourth Embodiment

(1) Detection of Change in Topology:

15 In the fourth embodiment of the present invention, the bus ID bitmap stored in the NCM is periodically acquired and compared with the previously acquired bus ID bitmap to detect a change in topology. This processing will be described in detail below with reference to Fig. 8.
20 A 1394 device 13 periodically transmits a request command to an NCM 4 to request it to return a bus ID bitmap. The 1394 device 13 can detect the addition of a new bus to the network or disconnection of an existing bus by comparing the bus ID bitmap acquired from the response command with
25 the previously acquired bus ID bitmap. If a new bus is

added, the 1394 device 13 recognizes the bus as an unchecked bus and makes a transition to a state S3. If a bus is disconnected, the 1394 device 13 makes a transition to a state S4. A change in topology may occur when the bus to which the NCM is connected is disconnected from the network. In this case, no response command is returned no matter how many a response command is retransmitted. For this reason, when the number of times of retransmission exceeds a predetermined retransmission count, the 1394 device 13 determines that the NCM is disconnected, and discards all the information stored in the management table. A state S0 is then restored.

In addition to the effects of the first embodiment of the present invention, the fourth embodiment described above can simplify the processing because it is only required to periodically transmit a request command to the NCM to detect a change in topology.

V. Fifth Embodiment

(1) Updating of Device Information:

In the fifth embodiment of the present invention, all acquired device information is discarded when a predetermined period of time has elapsed, and the device information of each 1394 device connected to the network is acquired again, thereby updating the device information. More specifically, a transition to a state S5 in Fig. 7 is

made, and all the device information stored in the management table is discarded after the lapse of a predetermined period of time. A transition to a state S0 is then made. This makes it possible to store the latest
5 device information in the management table at predetermined intervals even if a new device is connected or the topology of the network changes.

V-1. Modification

According to a method of updating device information,
10 when a predetermined period of time has elapsed, the device information of each 1394 device connected to the network is acquired again, and the acquired information is compared with the device information previously acquired and stored in the management table, thus extracting the
15 differences therebetween. A method of updating only different points with respect to the stored device information may be used.

In addition to the effects of the first embodiment of the present invention, the fifth embodiment described
20 above automatically updates the device information, and hence can simplify the device information update processing.

002200 002200 002200 002200 002200

WHAT IS CLAIMED IS:

1. A device information acquisition method of acquiring device information in which a function of devices is written from the devices connected to a network
5 constituted by a single bus which is a local bus to which the devices are connected or a network formed by connecting, through bridges, a plurality of buses including the local bus and remote buses to which the devices are not connected, comprising:
- 10 the discrimination step of discriminating whether the network is constituted by a plurality of buses or a single bus;
- the bus ID acquisition step of acquiring a bus ID assigned to each of the remote buses;
- 15 the information acquisition step of acquiring device information from all devices connected to the network; and
- the information discarding step of, when at least one of the remote buses is disconnected from the network, discarding device information of devices connected to the
20 disconnected remote bus,
- wherein if it is discriminated in the discrimination step that the network is constituted by a single bus, the information acquisition step is executed with respect to all devices connected to the local bus, and
- 25 if it is discriminated in the discrimination step

5 2. A method according to claim 1, wherein the discrimination step comprises checking whether the bridges are connected to the local bus, thereby discriminating whether the network is constituted by a plurality of buses.

4. A method according to claim 1, wherein
each of the bridges receives an asynchronous packet
on the local bus and holds forwarding information for
determining whether to forward the asynchronous packet to
the remote buses, and

5. A method according to claim 1, wherein

25 at least one bus ID management node for managing bus

the bus ID acquisition step comprises acquiring bus
5 IDs assigned to all the buses by acquiring the bus ID
usage information from the bus ID management node.

the identifier acquisition step of acquiring an
10 identifier assigned to each of the devices connected to
the buses of the network; and

7. A method according to claim 6, wherein
at least one identifier management node for managing
the identifiers, acquired by performing the identifier
acquisition step with respect to the respective devices
20 connected to each bus, by writing the identifiers in
identifier usage information is connected to each of the
buses of the network, and

the individual device information acquisition step is performed with respect to each of the devices identified by the identifier written in the identifier usage

the information acquisition step is performed again with respect to each of the devices connected to each of the remote buses when a value different from the previously acquired value is acquired in the acquisition step.

the update notification request step of requesting the bridge connected to the local bus to notify that the forwarding information held by the bridge is updated; and

when the bit updated from the first state value to the second state value is detected in the forwarding information check step, the information acquisition step is performed with respect to each device connected to a bus having a bus ID represented by the bit, and when the bit updated from the second state value to the first state

step of periodically acquiring the bus ID usage information and checking on the basis of the acquired bus ID usage information whether a newly used bus ID or a bus ID that has not been used exists, and

5 when existence of the newly used bus ID is detected
in the bus ID change check step, the information
acquisition step is performed with respect to each device
connected to a bus identified by the bus ID, and when
existence of a bus ID that has not been used is detected,
10 the information discarding step is performed with respect
to each device connected to a bus identified by the bus ID.

14. A method according to claim 1, further comprising
updating the acquired device information by periodically
performing the discrimination step, the bus ID acquisition
15 step, and the information acquisition step.

15. A device controller which is a node connected to a network formed by connecting a plurality of buses to each other through a bridge, comprising acquisition execution means for executing the device information acquisition method defined in any one of claims 1 to 14.

16. A bridge for forming a network by connecting a plurality of buses to which devices are connected, comprising transmission means for, upon reception of a read request for information held by the bridge, transmitting the information to a request source in

ABSTRACT OF THE DISCLOSURE

In a device information acquisition method, it is discriminated whether a network is constituted by a plurality of buses or a single bus. A bus ID assigned to each of remote buses is acquired. Device information is acquired from each of devices connected to the network. When at least one of the remote buses is disconnected from the network, the device information of the device connected to the disconnected remote bus is discarded. If it is discriminated that the network is constituted by a single bus, the information of all devices connected to the local bus is acquired. If it is discriminated that the network is constituted by a plurality of buses, the information of all devices connected to each of the buses having the acquired bus ID is acquired. A device controller and bridges using the device information acquisition method are also disclosed.

002200-02912900

FIG. 1
PRIOR ART

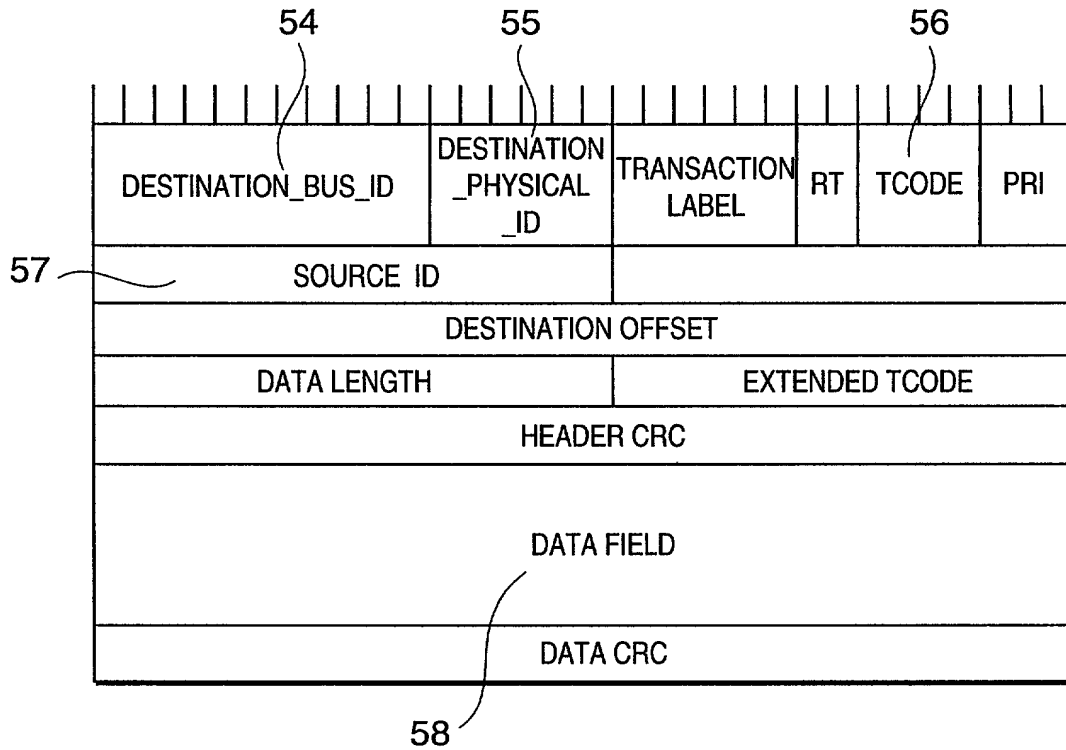


FIG. 2
PRIOR ART

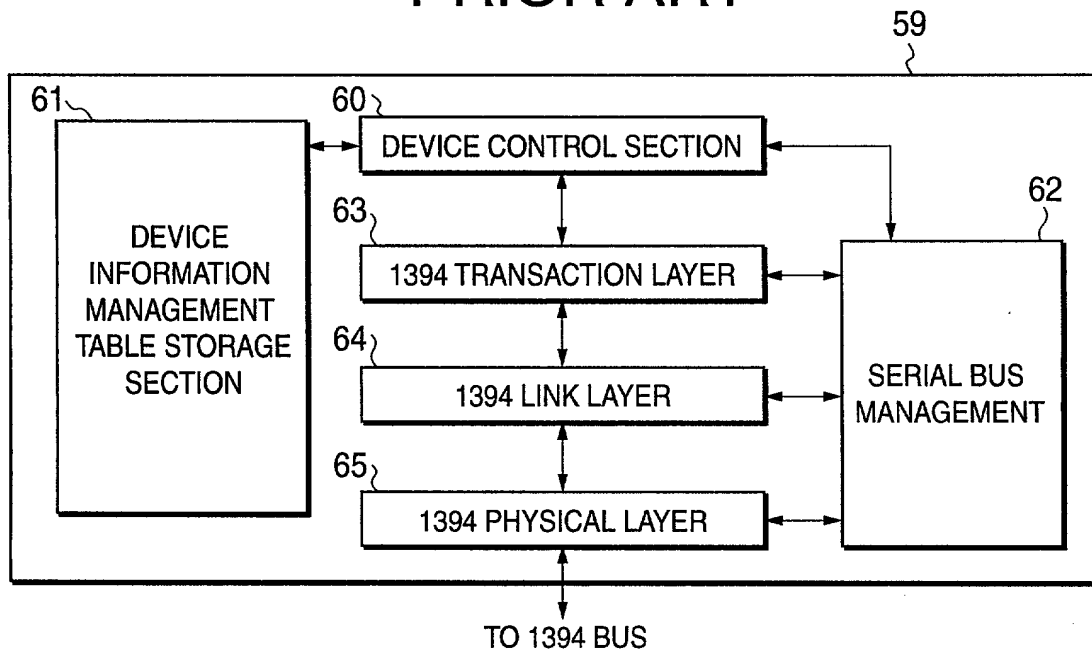


FIG. 3

PRIOR ART

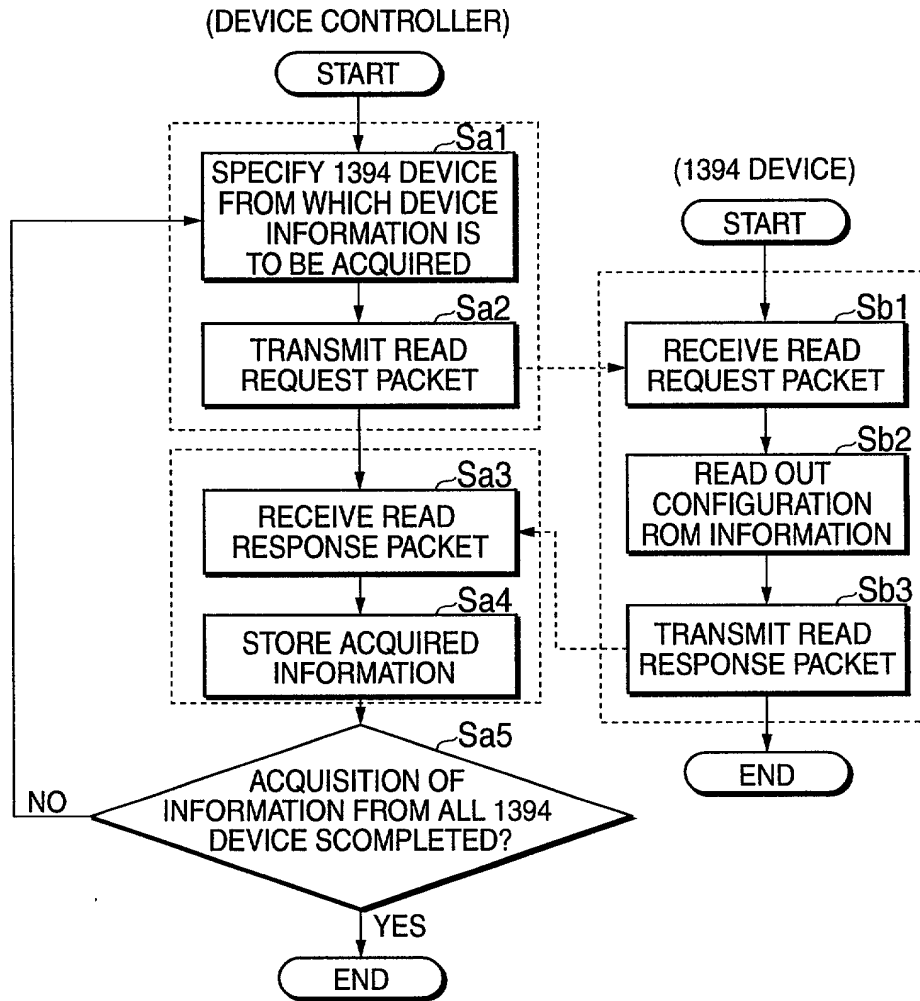


FIG. 4

PRIOR ART

66 PHYSICAL ID	67 DEVICE INFORMATION
0	CONFIGURATION ROM INFORMATION 1
1	CONFIGURATION ROM INFORMATION 2
⋮	⋮
62	CONFIGURATION ROM INFORMATION 62

FIG. 5
PRIOR ART

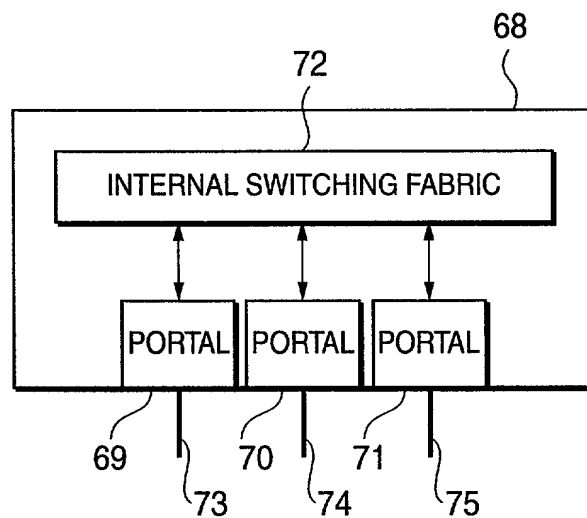


FIG. 6
PRIOR ART

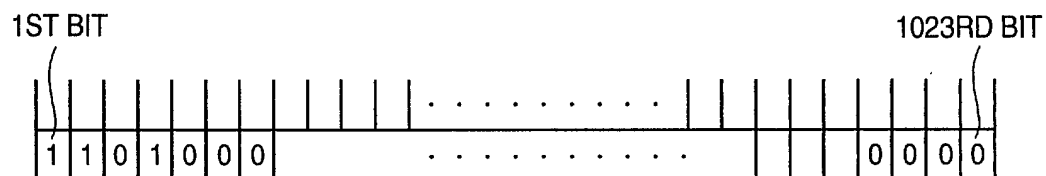


FIG. 7

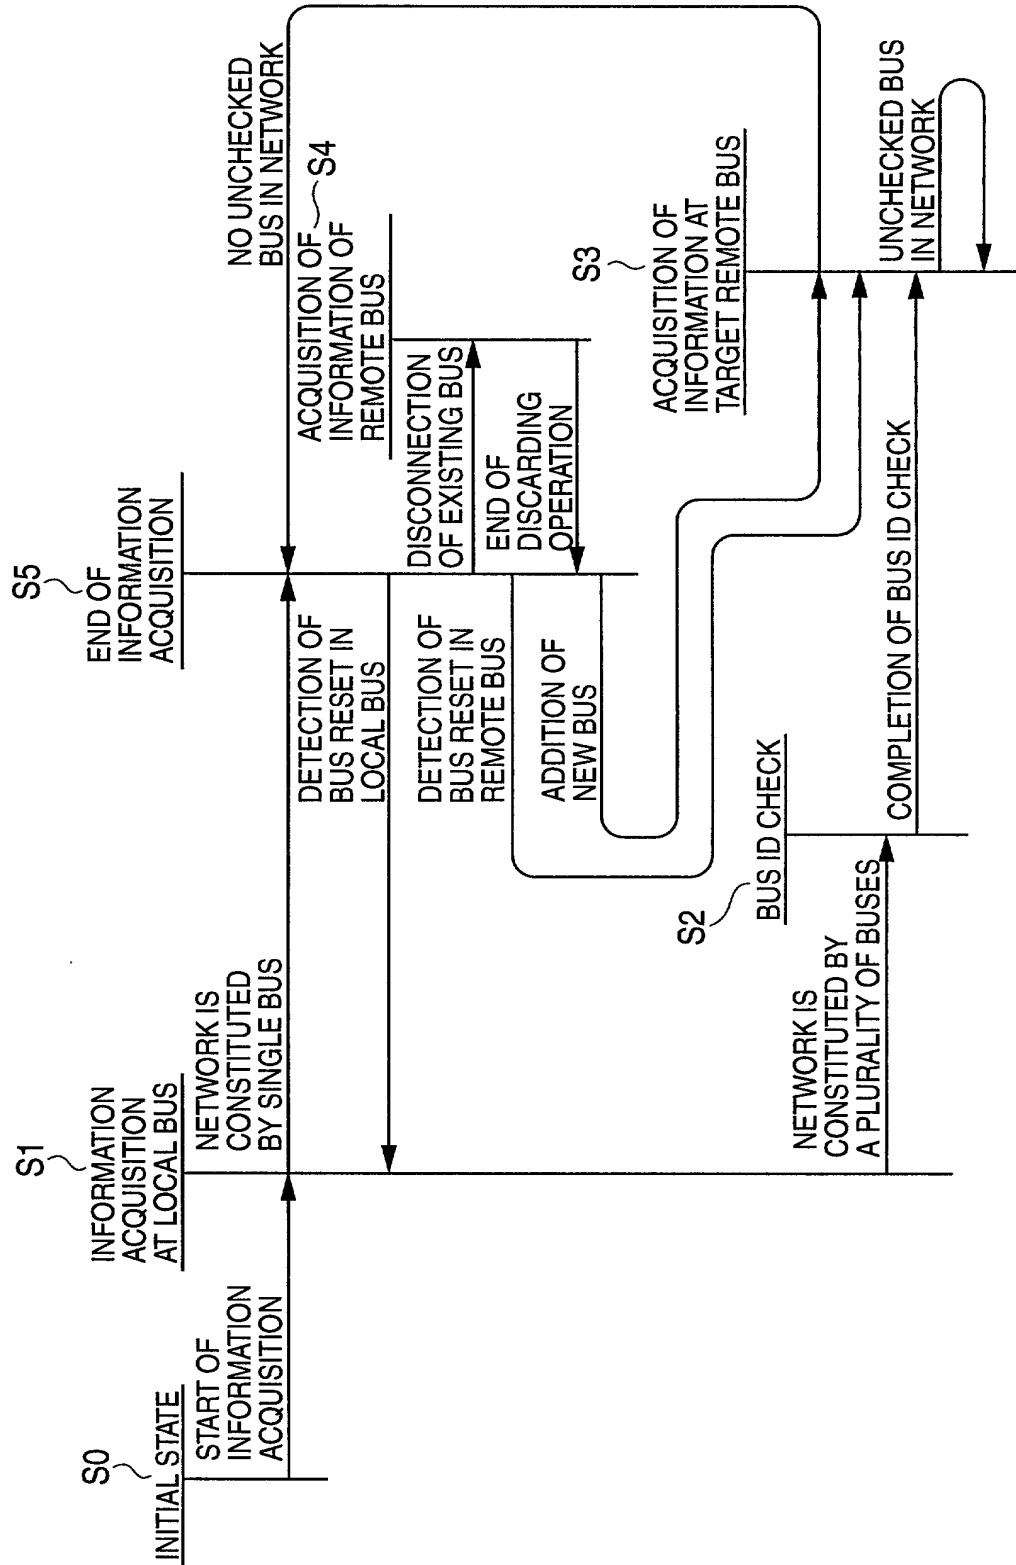


FIG. 8

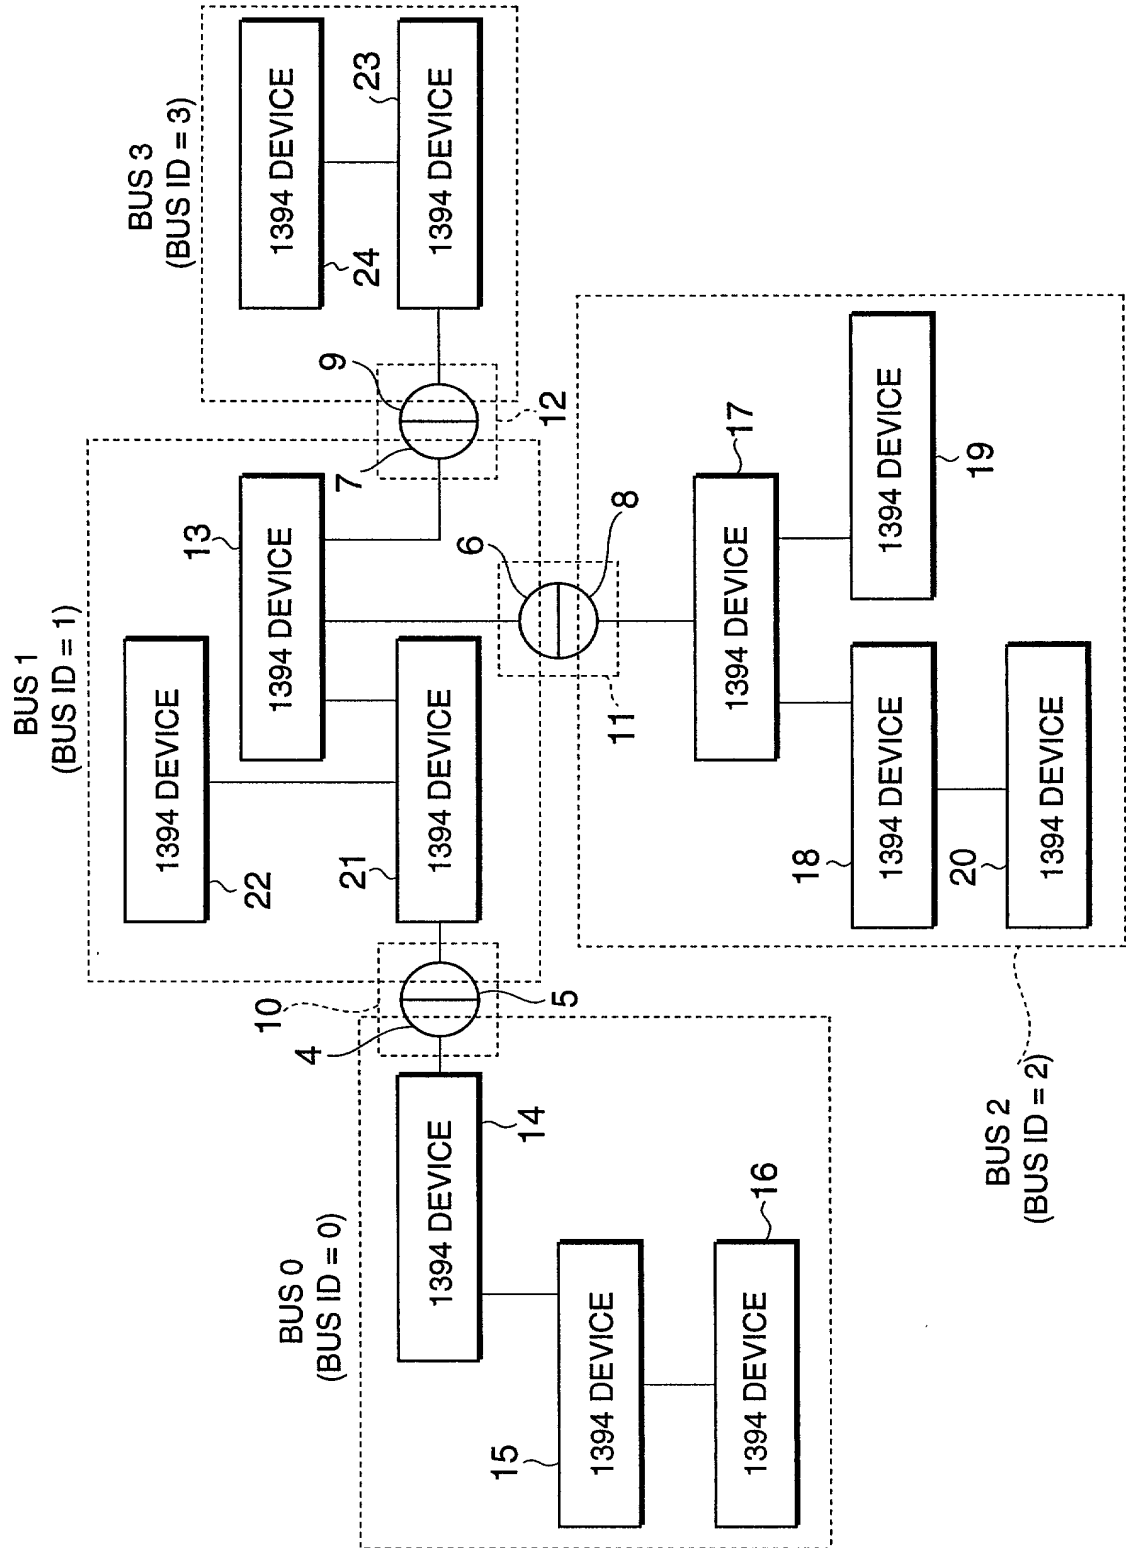


FIG. 9

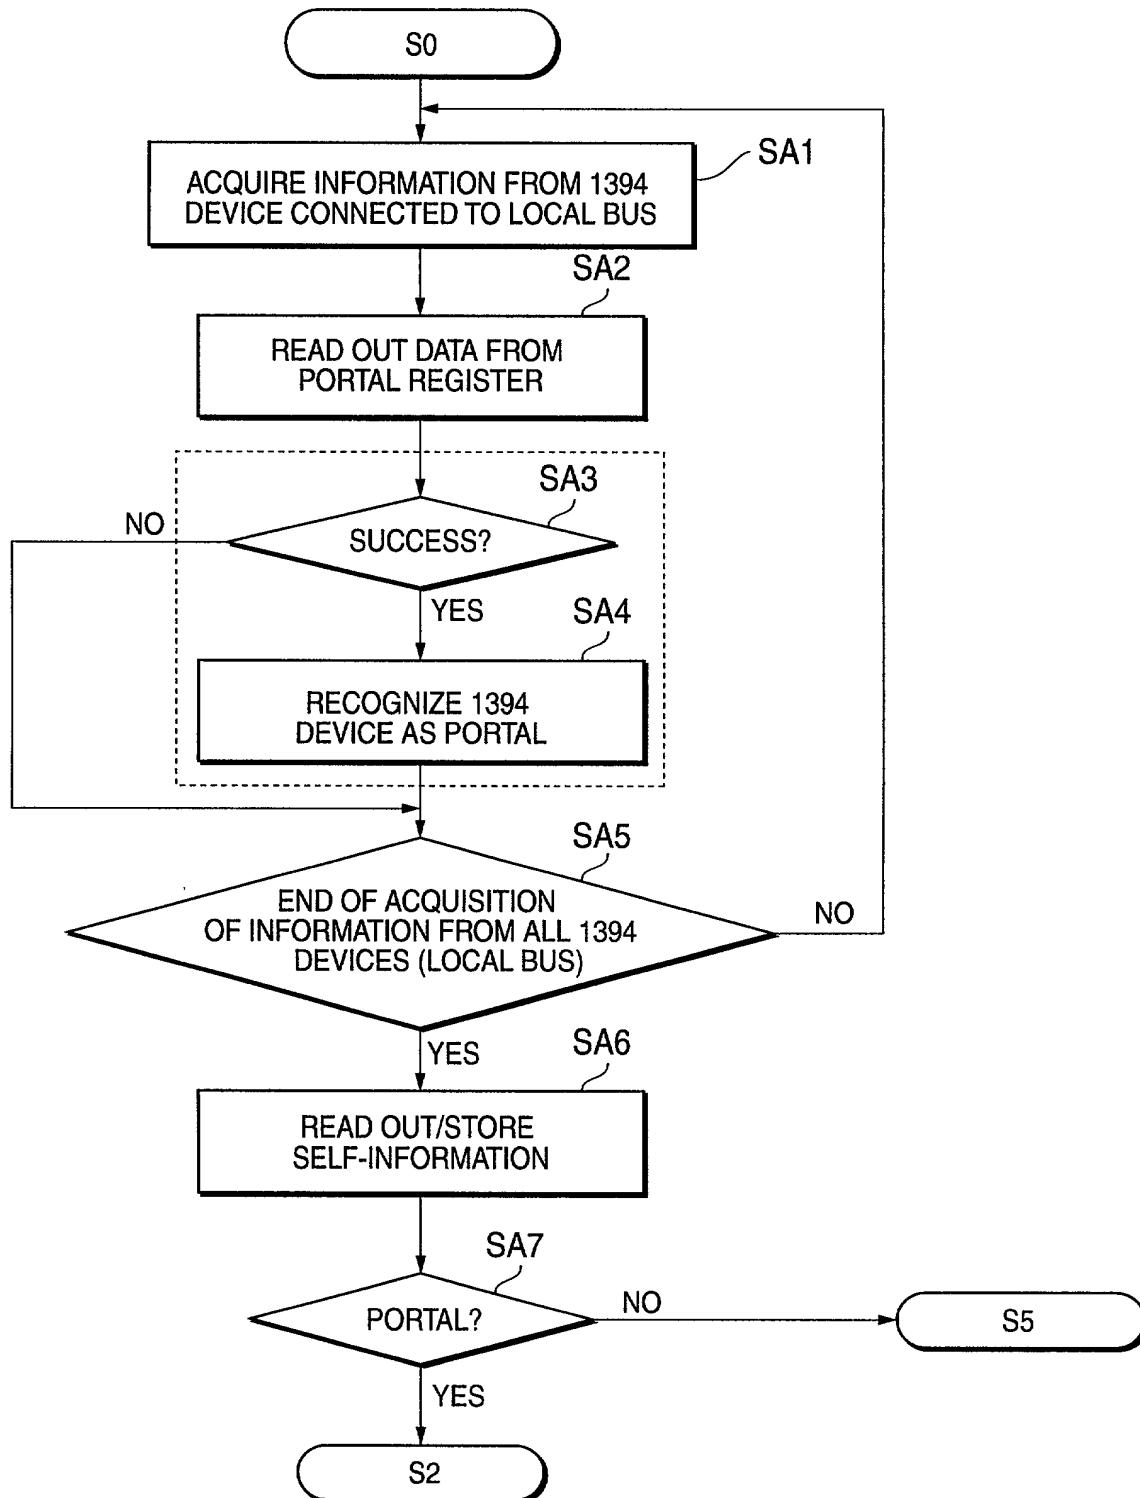


FIG. 11

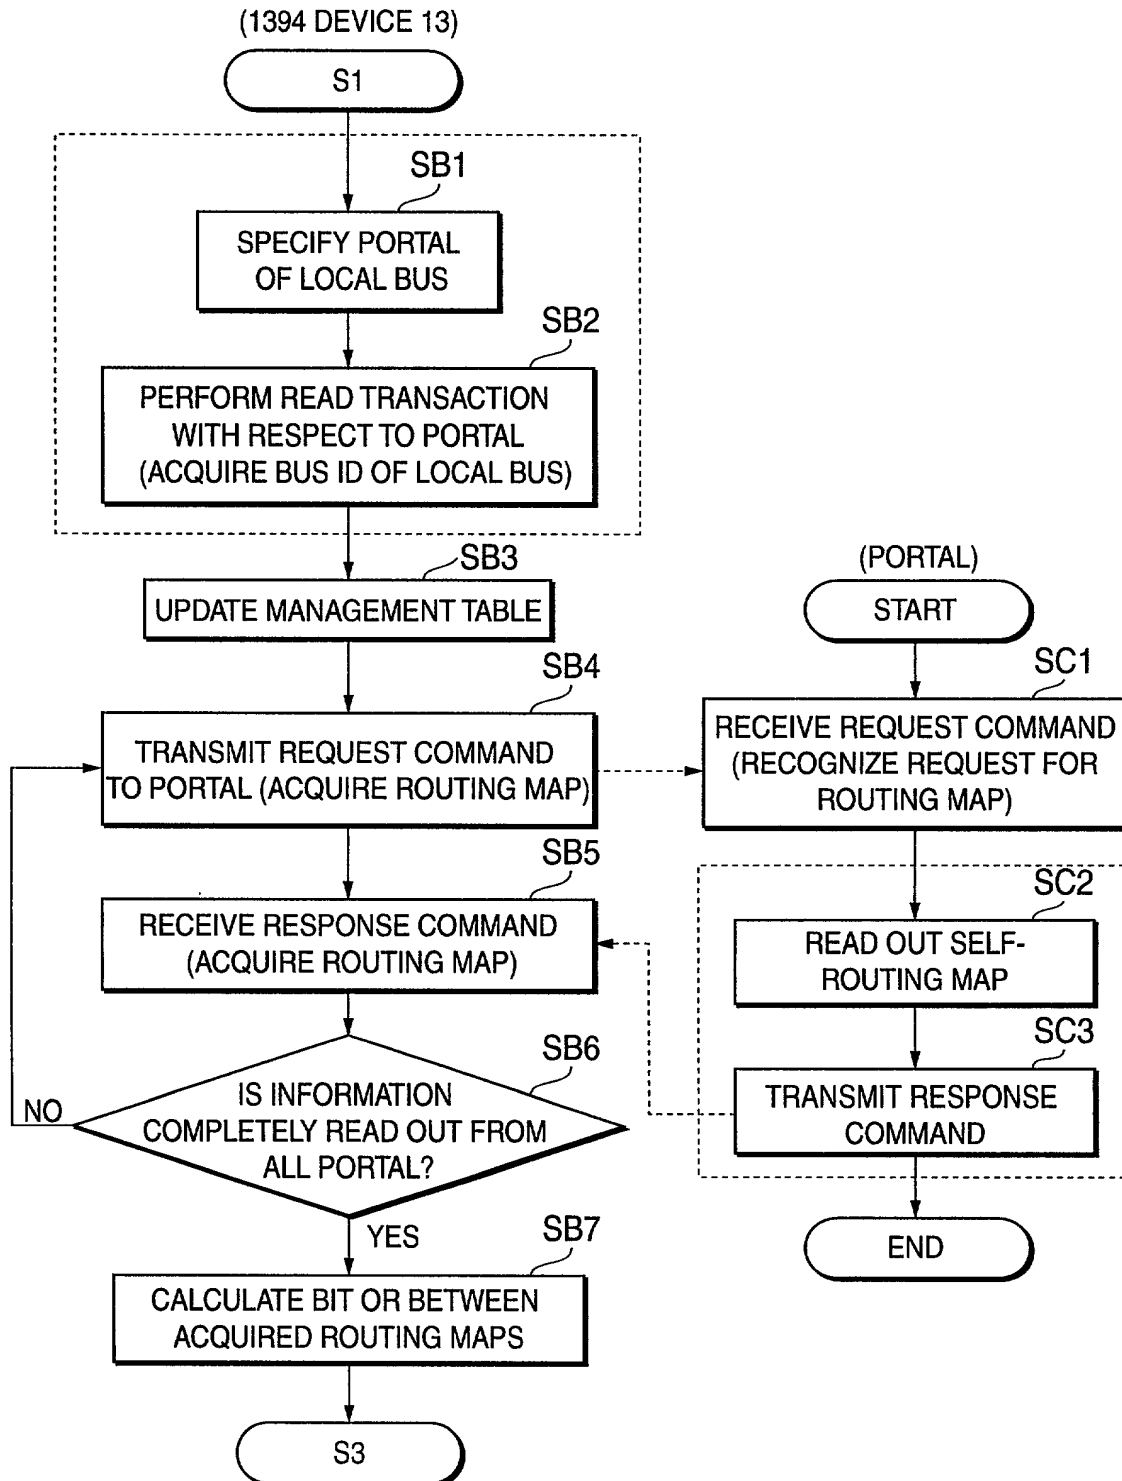


FIG. 12

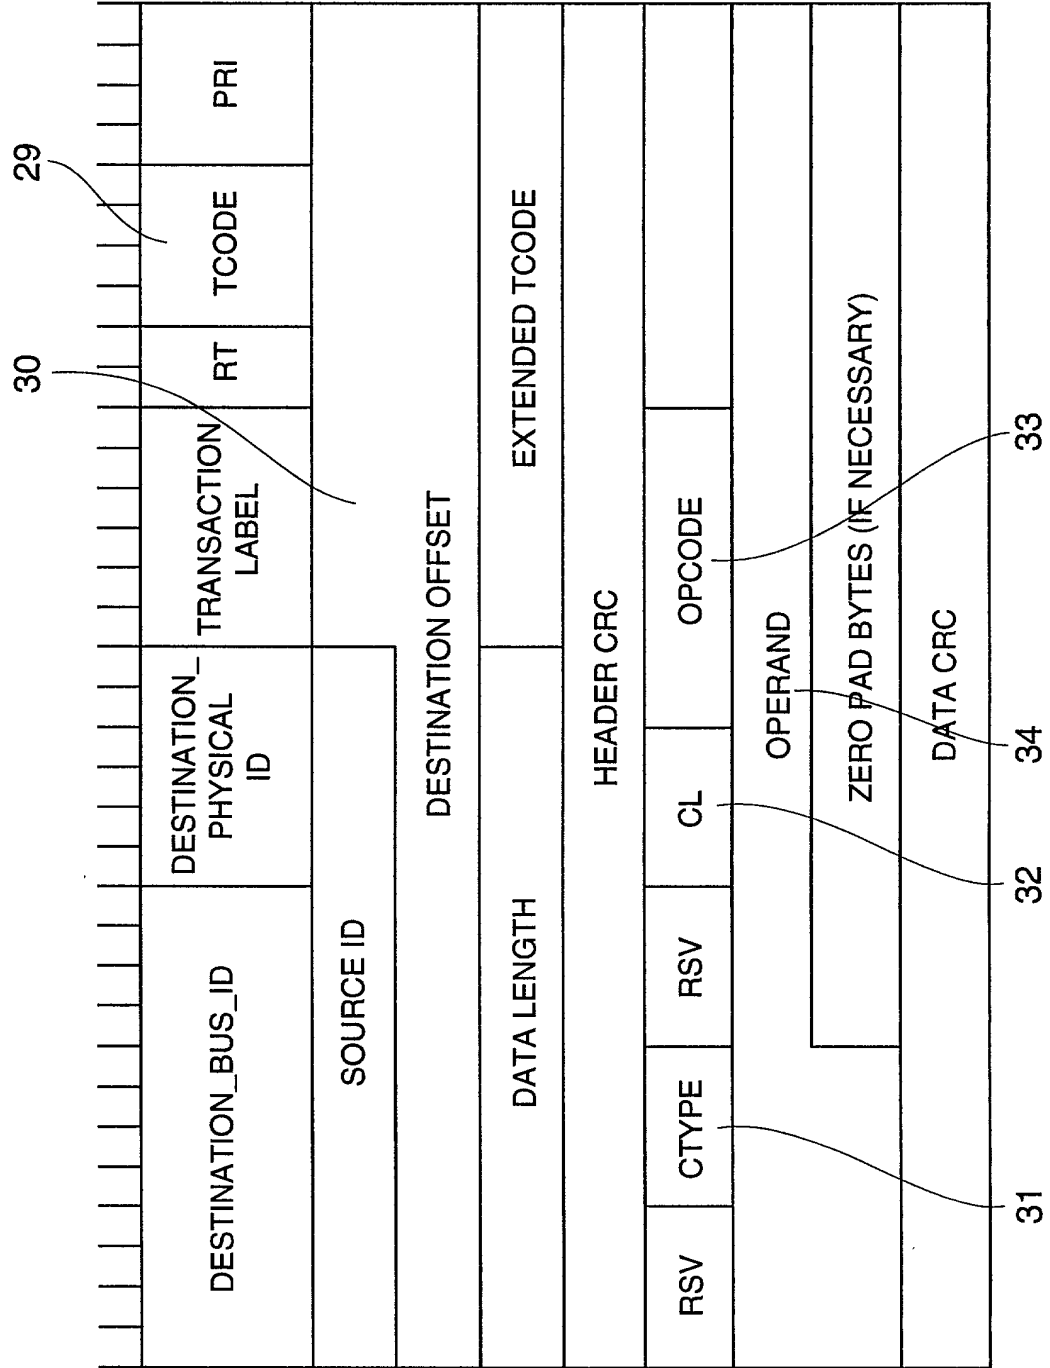


FIG. 13

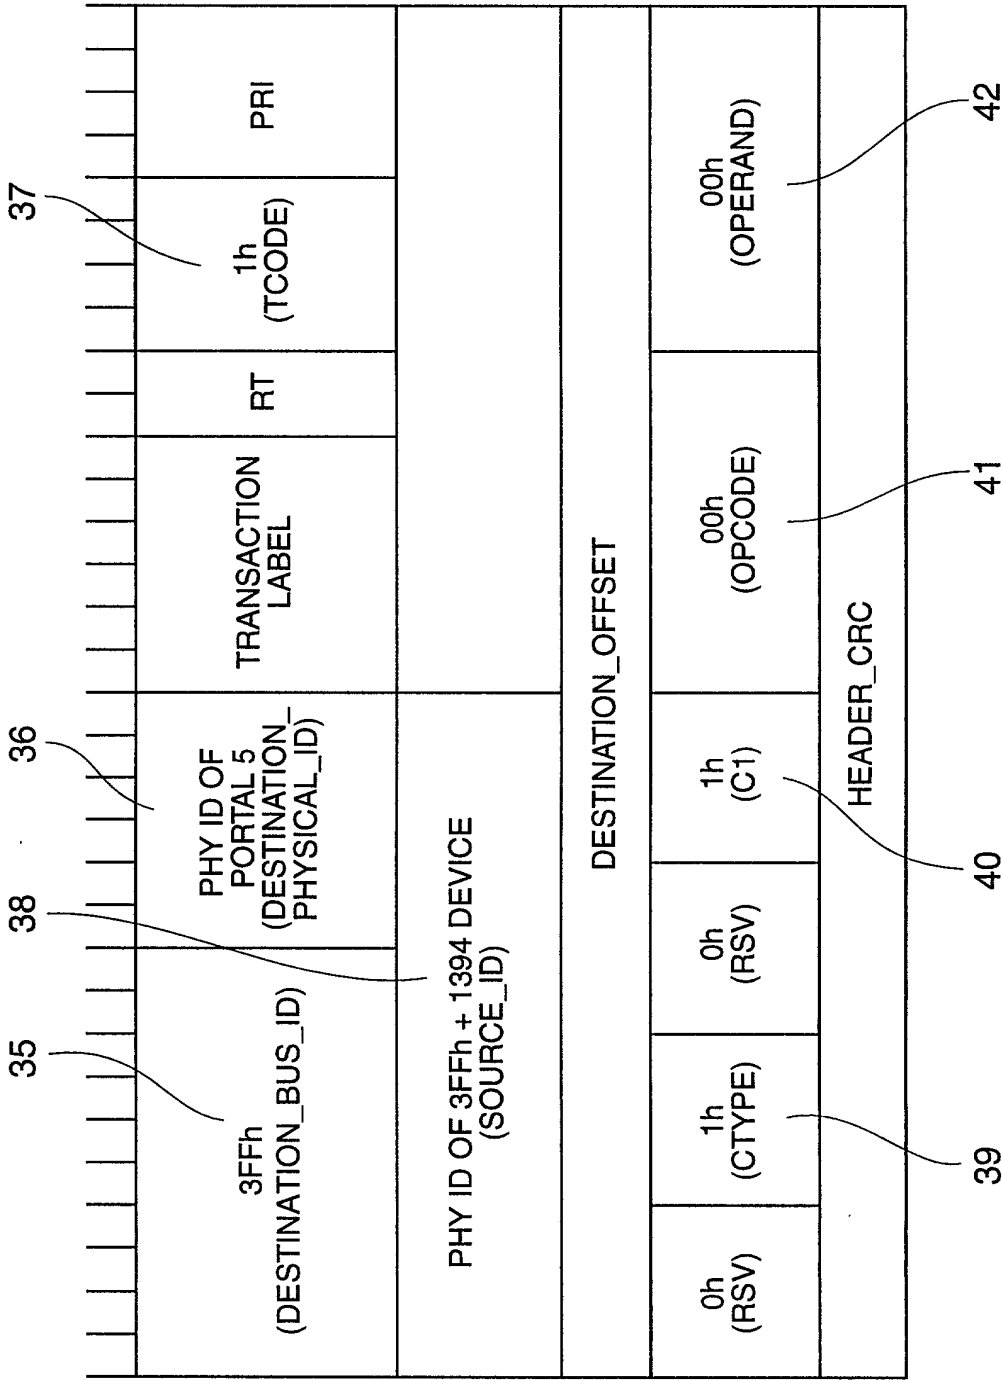


FIG. 14

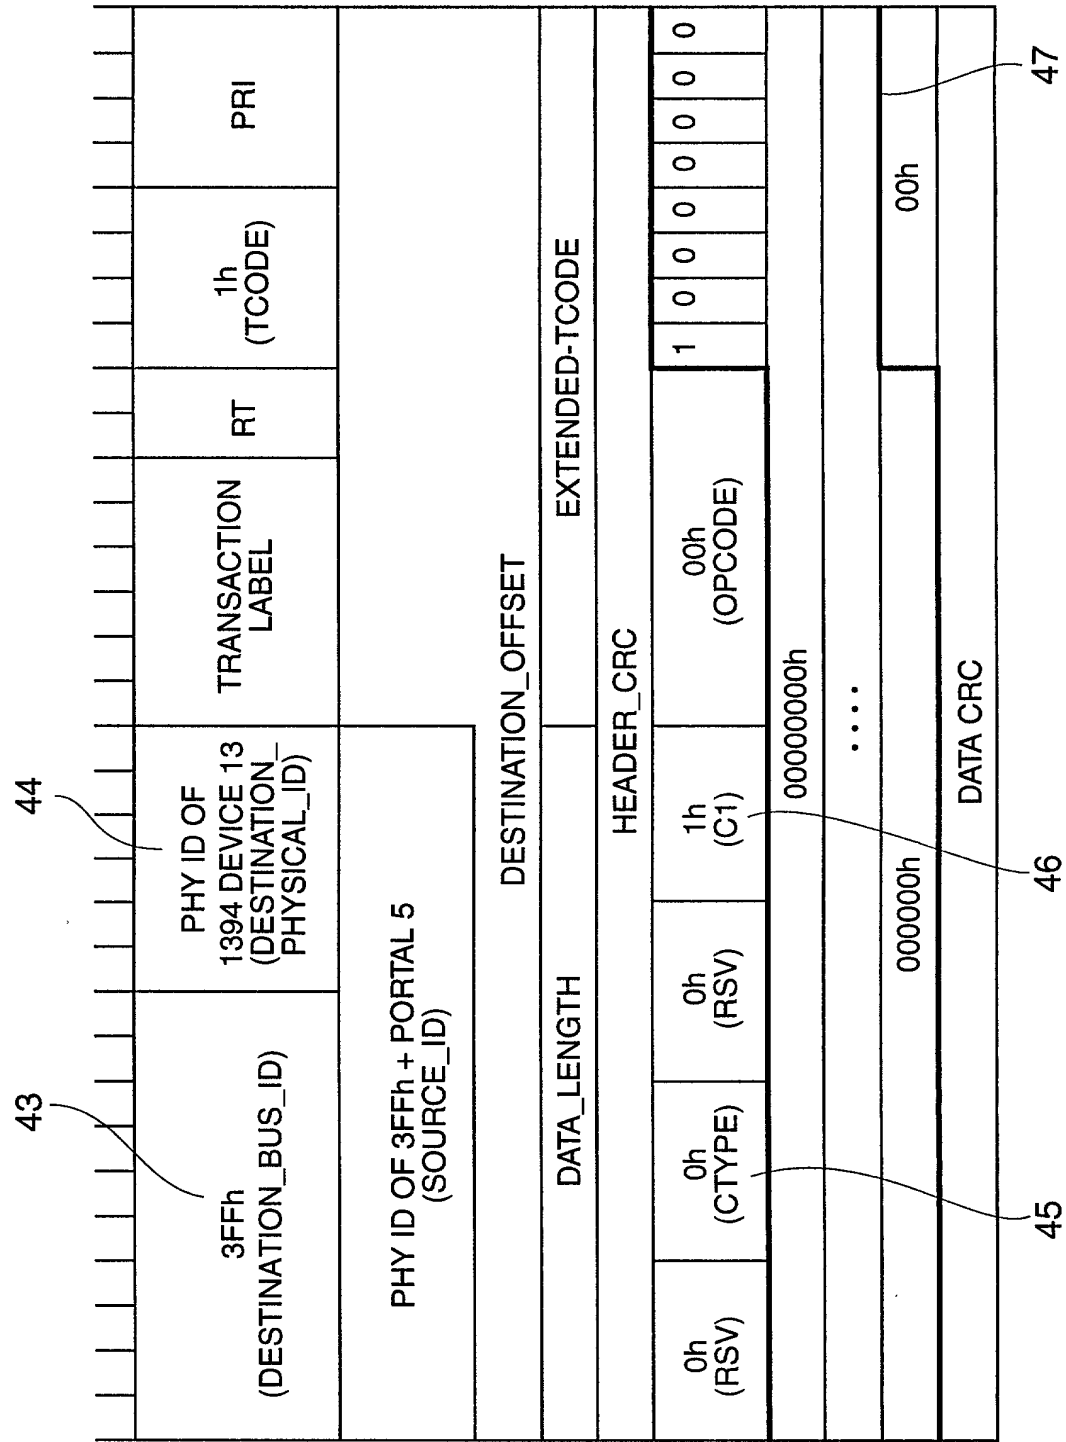


FIG. 15

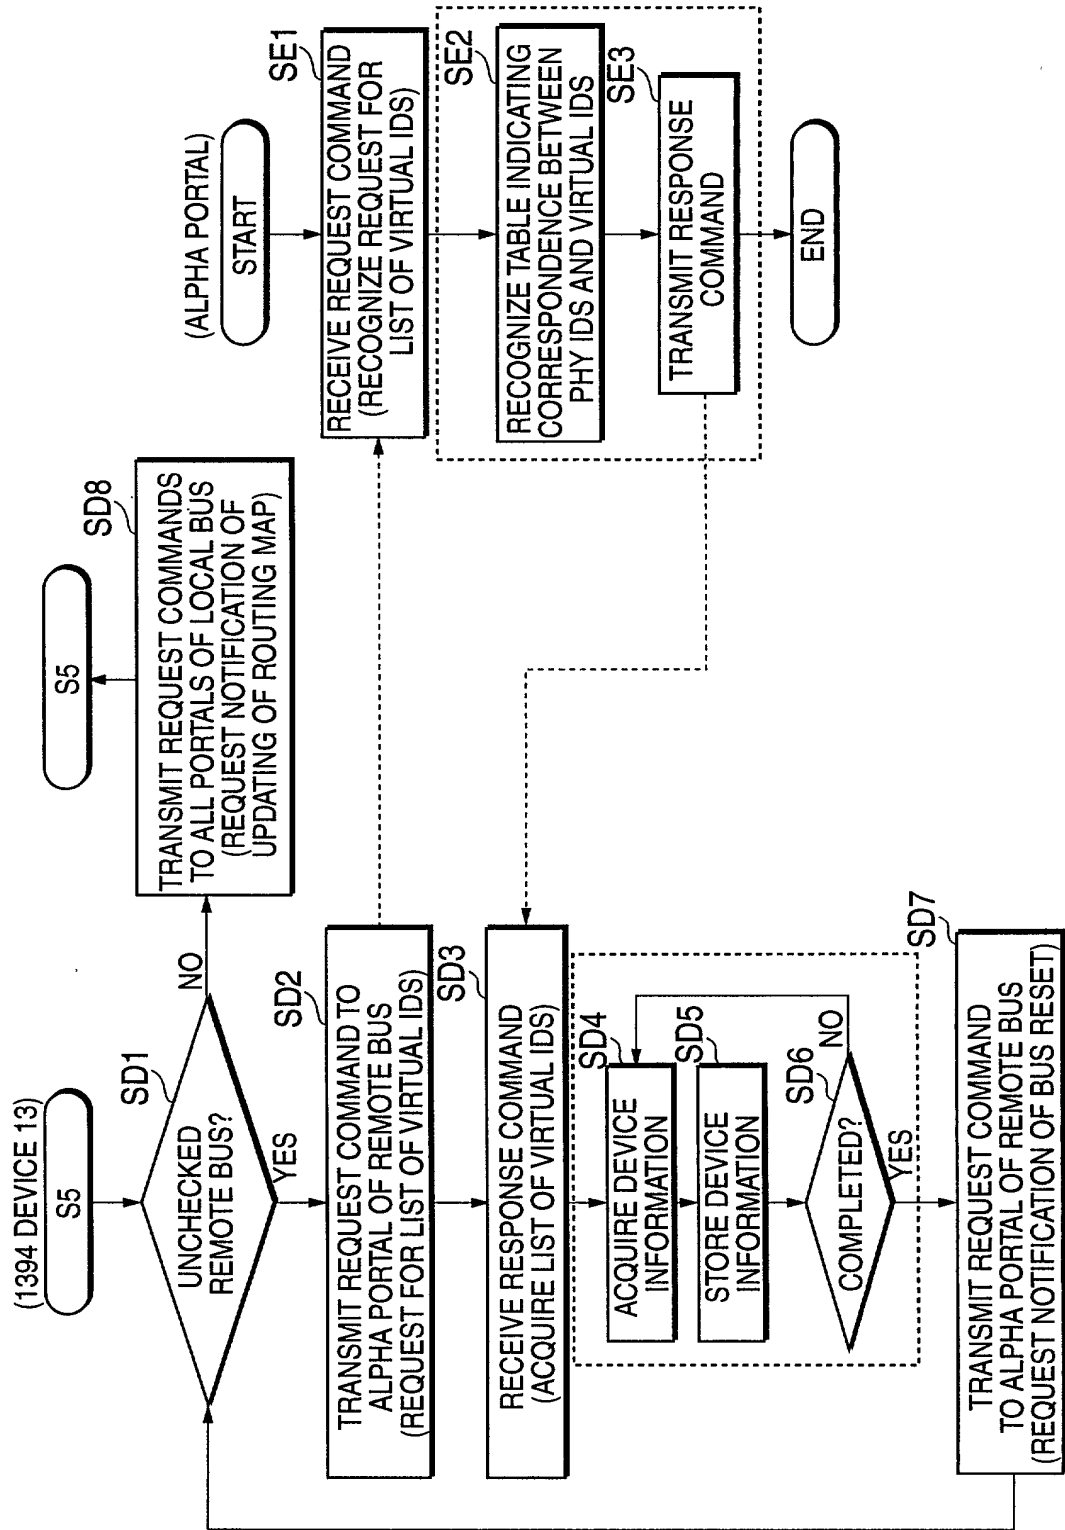


FIG. 16

BUS ID (10BIT)	PHY ID (6BIT)	DEVICE INFORMATION	PORTAL
001h	00h	DEVICE INFORMATION OF 1394 DEVICE 21	0
001h	01h	DEVICE INFORMATION OF PORTAL 6	1
001h	02h	DEVICE INFORMATION OF PORTAL 3	1
001h	03h	DEVICE INFORMATION OF NODE 13	0
001h	04h	DEVICE INFORMATION OF 1394 DEVICE 22	0
001h	05h	DEVICE INFORMATION OF PORTAL 5	1
000h	00h	DEVICE INFORMATION OF PORTAL 4	1
000h	01h	DEVICE INFORMATION OF 1394 DEVICE 14	0
000h	02h	DEVICE INFORMATION OF 1394 DEVICE 15	0
000h	03h	DEVICE INFORMATION OF 1394 DEVICE 16	0
002h	00h	DEVICE INFORMATION OF PORTAL 11	1
.	.	.	.
.	.	.	.
.	.	.	.
003h	02h	DEVICE INFORMATION OF 1394 DEVICE 24	0

FIG. 17

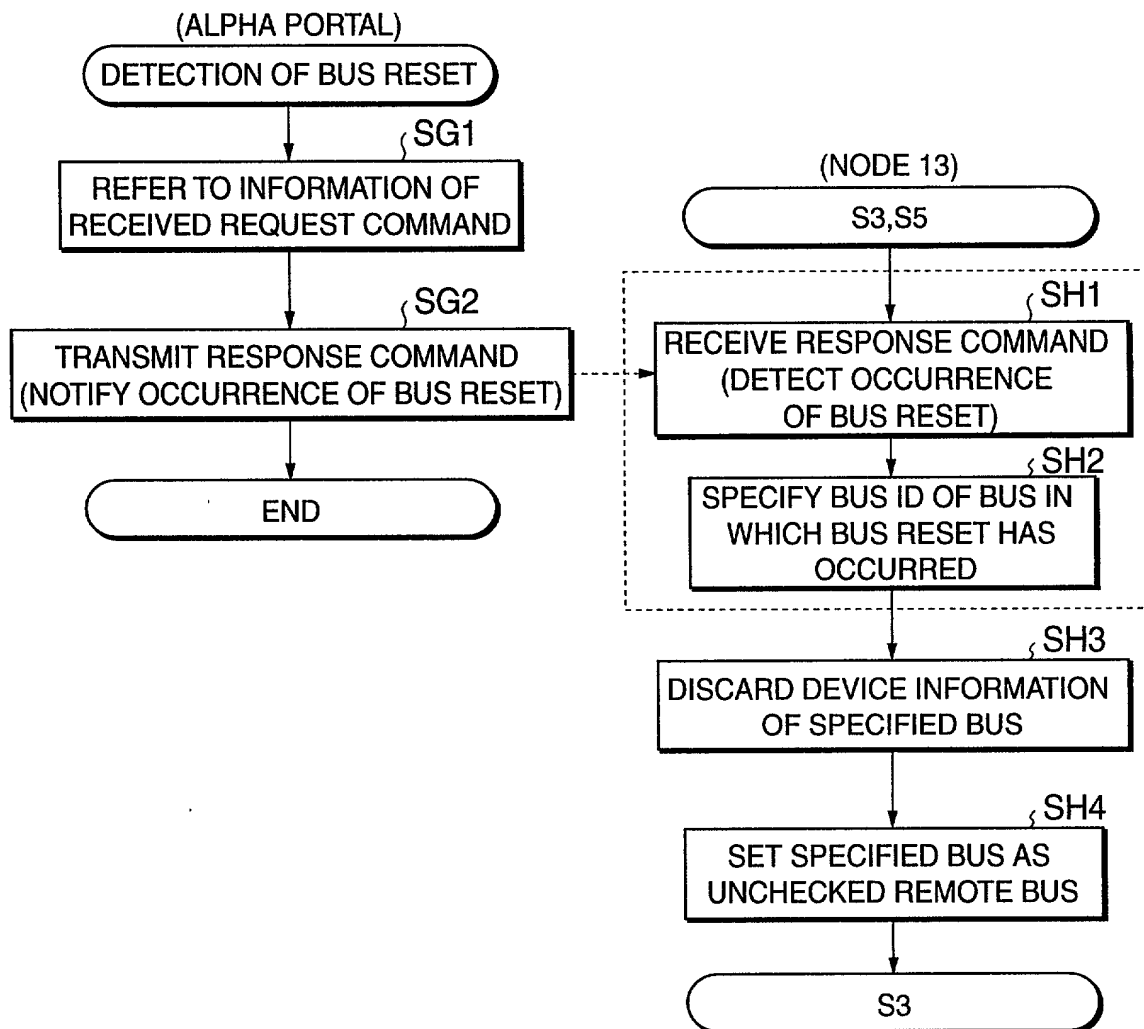


FIG. 18

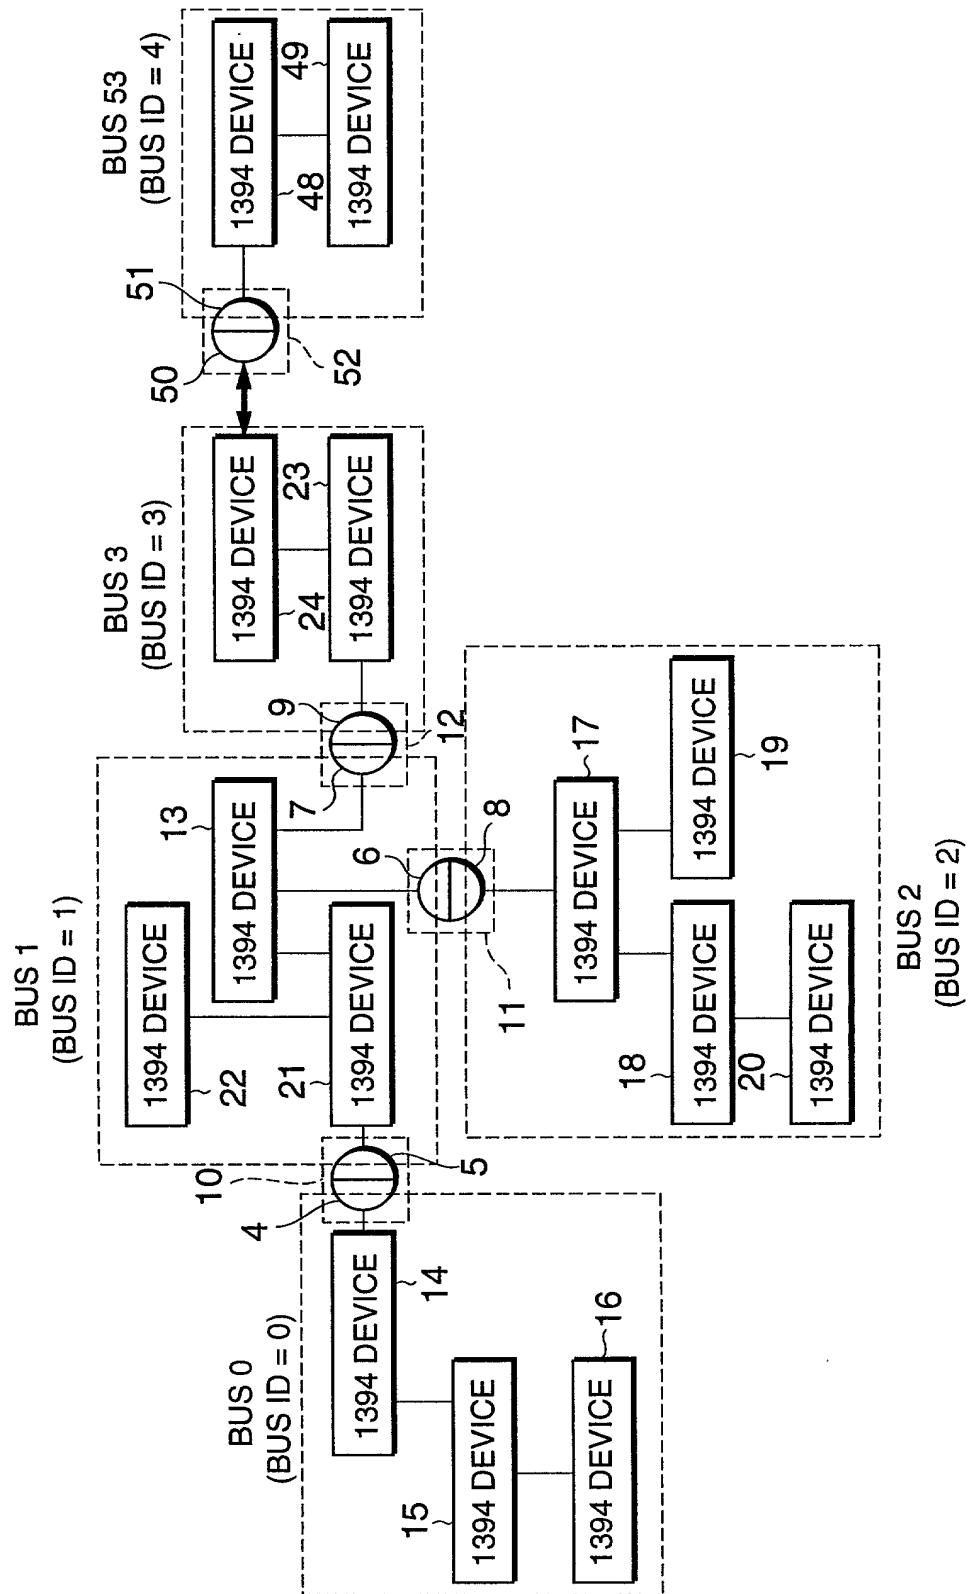


FIG. 19


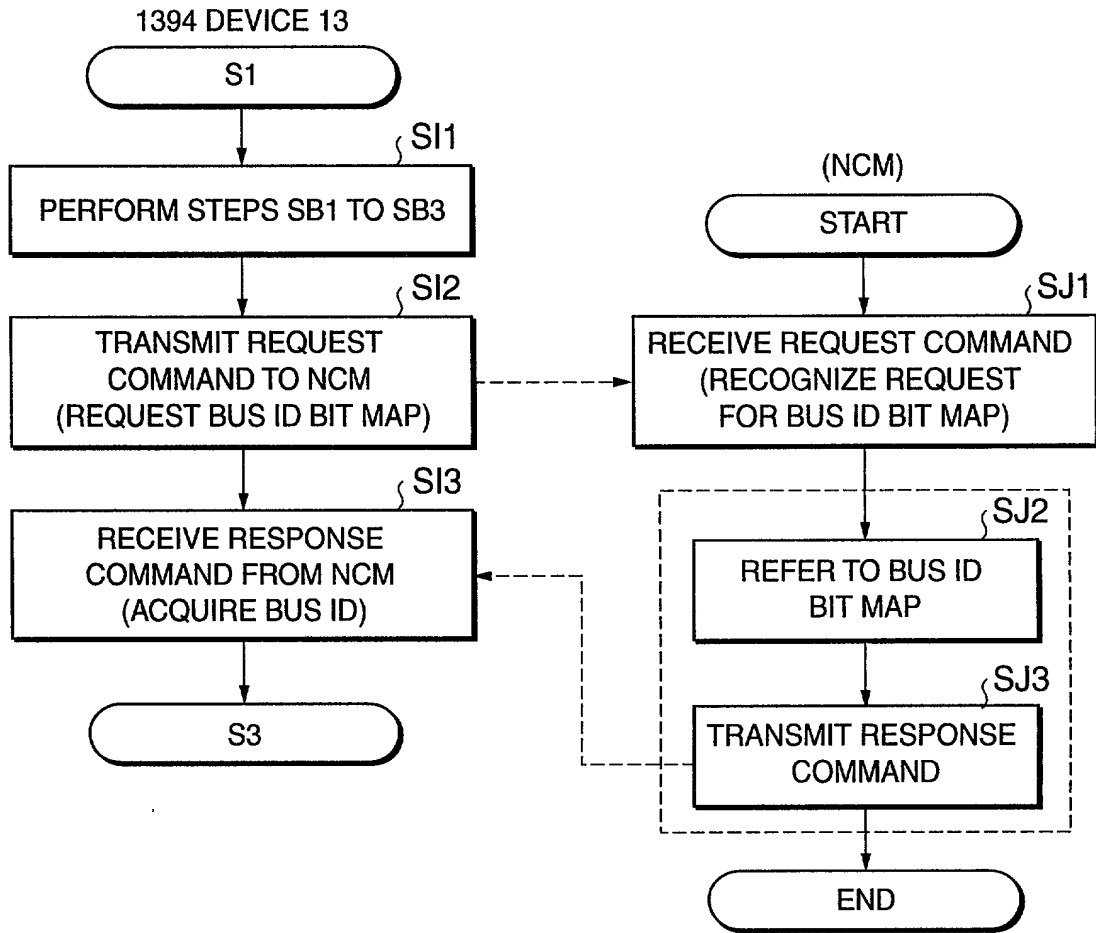


FIG. 20

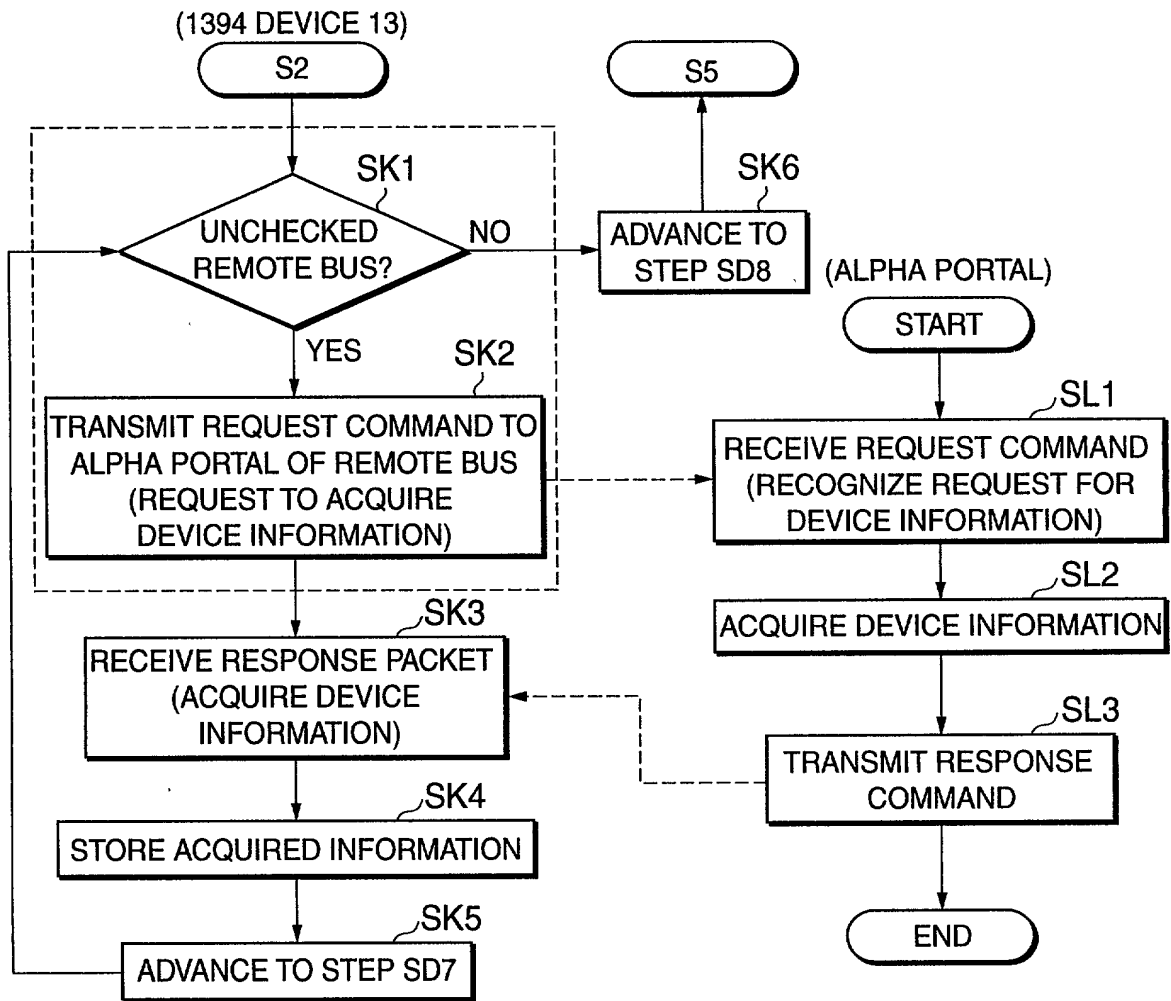

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DEVICE INFORMATION ACQUISITION METHOD, DEVICE CONTROLLER, AND BRIDGE

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known by me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

NUMBER	COUNTRY	DAY/MONTH/YEAR FILED	PRIORITY CLAIMED
11-275368	Japan	28/9/1999	YES

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.


APPLICATION NO.	FILING DATE

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is known by me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

APPLICATION SERIAL NO.	FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

I hereby appoint as my attorneys, with full powers of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Stephen A. Bent, Reg. No. 29,768; David A. Blumenthal, Reg. No. 26,257; John J. Feldhaus, Reg. No. 28,822; Donald D. Jeffery, Reg. No. 19,980; Eugene M. Lee, Reg. No. 32,039; Peter G. Mack, Reg. No. 26,001; Brian J. McNamara, Reg. No. 32,789; Sybil Meloy, Reg. No. 22,749; George E. Quillin, Reg. No. 32,792; Colin G. Sandercock, Reg. No. 31,298; Bernhard D. Saxe, Reg. No. 28,665; Charles F. Schill, Reg. No. 27,590; Richard L. Schwaab, Reg. No. 25,479; Arthur Schwartz, Reg. No. 22,115; Harold C. Wegner, Reg. No. 25,258.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole Inventor Jun-ichi MATSUDA	Signature of First or Sole Inventor <i>Jun-ichi Matsuda</i> 	Date September 2000
Residence Address Tokyo, Japan	Country of Citizenship Japan	
Post Office Address c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan		

Full Name of Second Inventor	Signature of Second Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		

Full Name of Third Inventor	Signature of Third Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		

Full Name of Fourth Inventor	Signature of Fourth Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		

Full Name of Fifth Inventor	Signature of Fifth Inventor	Date
Residence Address	Country of Citizenship	
Post Office Address		